

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 7/26, H04L 12/28	A1	(11) International Publication Number: WO 00/28752 (43) International Publication Date: 18 May 2000 (18.05.00)
(21) International Application Number: PCT/US99/26375 (22) International Filing Date: 9 November 1999 (09.11.99) (30) Priority Data: 09/188,856 9 November 1998 (09.11.98) US (71) Applicant: JETCELL, INC. [US/US]; 173 Constitution Drive, Menlo Park, CA 94025 (US). (72) Inventors: SAYERS, Ian, L.; 107 Wharf Row, Redwood City, CA 94065 (US). LONG, Paul, J.; 350 Page Street, San Francisco, CA 94102 (US). YANG, Sheausong; 13651 Beaumont Avenue, Saratoga, CA 95070 (US). (74) Agent: LOVEJOY, David, E.; Fliesler, Dubb, Meyer and Lovejoy LLP, Four Embarcadero Center, Suite 400, San Francisco, CA 94111-4156 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: METHOD AND APPARATUS FOR INTEGRATED WIRELESS COMMUNICATIONS IN PRIVATE AND PUBLIC NETWORK ENVIRONMENTS (57) Abstract A communication system formed by a private network that includes a private wireless network. The communication system includes a public wireless network using a public wireless protocol, such as GSM, and includes public networks, such as PSTN, ISDN and the Internet, using a wired protocol, such as IP. The private network also includes a local area network (LAN) and the private network connects to the public networks using a wired packet protocol, such as IP. The public and private wireless networks operate with the same public wireless protocol, such as GSM, and the private wireless network additionally operates with a wired packet protocol, such as IP. The communication system permits users to operate freely in both public and private wireless networks using standard mobile stations while achieving high private network data rates. The communication system uses normal wireless handsets or other mobile or fixed stations without need for any modifications.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE**METHOD AND APPARATUS FOR INTEGRATED WIRELESS
COMMUNICATIONS IN PRIVATE AND PUBLIC NETWORK
5 ENVIRONMENTS****Background of the Invention**

The present invention is a method and apparatus that provides for wireless calls in private network environments and in public network environments. More particularly, this invention relates to communication systems that interconnect
10 wireless networks with private networks where the private networks typically are corporate networks that connect to public networks such as PSTN, ISDN and the Internet.

Conventional Cellular Systems

15 Present day cellular mobile telephone systems provide for a large and increasing demand for mobile services. Cellular systems "reuse" frequency within a group of cells to provide wireless two-way radio frequency (RF) communication to large numbers of users. Each cell covers a small geographic area and collectively a group of adjacent cells covers a larger geographic region. Each cell has a fraction
20 of the total amount of RF spectrum available to support cellular users. Cells are of different sizes (for example, macro-cell or micro-cell) and are generally fixed in capacity. The actual shapes and sizes of cells are complex functions of the terrain, the man-made environment, the quality of communication and the user capacity required. Cells are connected to each other via land lines or microwave links and
25 to the public-switched telephone network (PSTN) through telephone switches that are adapted for mobile communication. The switches provide for the hand-off of users from cell to cell and thus typically from frequency to frequency as mobile users move between cells.

In conventional cellular systems, each cell has a base station with RF transmitters and RF receivers co-sited for transmitting and receiving communications to and from cellular users in the cell. The base station employs forward RF frequency bands (carriers) to transmit forward channel communications to users and employs reverse RF carriers to receive reverse channel communications from users in the cell.

The forward and reverse channel communications use separate frequency bands so that simultaneous transmissions in both directions are possible. This operation is referred to as frequency division duplex (FDD) signaling. In time division duplex (TDD) signaling, the forward and reverse channels take turns using the same frequency band.

The base station in addition to providing RF connectivity to users also provides connectivity to a Mobile Services Switching Center (MSC). In a typical cellular system, one or more MSCs will be used over the covered region. Each MSC can service a number of base stations and associated cells in the cellular system and supports switching operations for routing calls between other systems (such as the PSTN) and the cellular system or for routing calls within the cellular system.

Base stations are typically controlled from the MSC by means of a Base Station Controller (BSC). The BSC assigns RF carriers to support calls, coordinates the handoff of mobile users between base stations, and monitors and reports on the status of base stations. The number of base stations controlled by a single MSC depends upon the traffic at each base station, the cost of interconnection between the MSC and the base stations, the topology of the service area and other similar factors.

A handoff between base stations occurs, for example, when a mobile user travels from a first cell to an adjacent second cell. Handoffs also occur to relieve the load on a base station that has exhausted its traffic-carrying capacity or where

poor quality communication is occurring. The handoff is a communication transfer for a particular user from the base station for the first cell to the base station for the second cell. During the handoff in conventional cellular systems, there may be a transfer period of time during which the forward and reverse communications to the mobile user are severed with the base station for the first cell and are not established with the second cell.

In time division multiple access (TDMA) systems, multiple channels are defined using the same carrier. The separate channels each transmit discontinuously in bursts which are timed so as not to interfere with the other channels on that carrier. Typically, TDMA implementations also employ FDMA techniques. Carriers are reused from cell to cell in an FDMA scheme, and on each carrier, several channels are defined using TDMA methods. The Global System for Mobile Communications (GSM), PCS1900, IS-136, and PDC standards are examples of TDMA methods in current use.

The present specification uses a GSM system for purposes of explanation but the present invention applies to any wireless system protocol.

GSM Cellular Systems

The GSM system architecture is described, for example, in detail by M. Mouly and M.-B. Pautet, *The GSM System for Mobile Communications*, 1992 and Mouly and M.-B. Pautet, *GSM Protocol Architecture: Radio Sub-system Signaling*, IEEE 41st Vehicular Technology Conference, 1991. The following sections highlight some unique aspects of GSM systems.

The GSM system provides many advanced services, including: ISDN compatible supplementary services; Global roaming among GSM networks and other network types; advanced packet data services.

GSM System Architecture

There is a very comprehensive set of GSM Specifications which define the three major components of any GSM network, namely, the *Mobile Station* (MS), *Base Station Sub-System* (BSS) and the *Network Sub-System* (NSS).

5

Base Station Subsystem (BSS)

The Base Station Subsystem (BSS) is subdivided into two main entities, the Base Transceiver Station (BTS) and the Base Station Controller (BSC). The BTS includes the radio transceivers that define the radio cell and supports the radio (Um) interface link to the mobile station. The BTS further supports the defined channel coding, encryption and speech coding functions. The BTS interfaces to the BSC via the Abis-interface.

The Base Station Controller (BSC) manages the radio resources of multiple BTSs. The BSC controls all of the functions related to the radio network, including the allocation and release of radio resources and control of radio interface handovers. The BSC interfaces to the MSC via the A-interface.

Network Subsystem

The network subsystem (NSS) comprises four components these are, the Mobile services Switching Center (MSC), Home Location Register (HLR), Visitor Location Register (VLR), Authentication Centre (AuC) and the Equipment Identity Register (EIR).

The main part of the network subsystem (NSS) is provided by the **Mobile services Switching Center (MSC)**. The MSC provides the ability to track the mobile user, switch calls to/from the user to the PSTN/ISDN/PLMN (public land mobile network) and maintain contact with the mobile user via radio handovers.

The GSM PLMN (GSM public land mobile network) contains two database functions related to the mobility of the user these are the Home Location Register (HLR) and the Visited Location Register (VLR).

The **Home Location Register (HLR)** is used by the operator to maintain data on all their subscribers. The subscriber data includes both fixed data, such as International Mobile Subscriber Identity (IMSI), subscriber MSISDN number and selected supplementary services, and dynamic data such as whereabouts of the mobile user and current settings for any supplementary services. Whenever a mobile users roams into a new Visitor Location Register (VLR) area the HLR
5 downloads the subscriber data to the VLR. The HLR is also required to deal with mobile terminating calls by routing the call to the correct VLR for further processing.
10

The **Visitor Location Register (VLR)** is used as a local cache to store the subscriber data near the current location of the mobile user. Once the VLR has downloaded the subscriber data the mobile user can begin to use the services
15 provided by the network. The process of downloading the user data and establishing a presence in a particular location is called roaming.

In order to prevent fraudulent use of the network the GSM PLMN also contains two further databases the Authentication Centre (AUC) and the Equipment
20 Identity Register (EIR).

The **Authentication Center (AUC)** is maintained in a secure environment since it contains the network authentication algorithms. The network uses this database to obtain data that is used to "challenge" the mobile user when they make an access to the network. The AUC uses two algorithms known as A3
25 and A8, which are also stored in the Subscriber Identity Module (SIM) of the user.

The A3 algorithm is used to authenticate the user by the familiar challenge response mechanism. The A8 algorithm is used to generate the required key for the

radio interface encryption algorithm known as A5. Generally the A3 and A8 algorithms are developed by the network operators.

The **Equipment Identity Register (EIR)** contains a list of all the valid International Mobile Equipment Identity (IMEI) values. Using the unique IMEI value associated with all mobiles it is possible to restrict the use of specific mobiles. This database is used to prevent the use of stolen or misbehaving mobile stations.

Operations and Maintenance

Associated with the BSS and NSS equipment are Operations and Maintenance Centers, OMC-R and OMC-S, respectively. The OMC-R and OMC-S provide the following standard operations and maintenance control functions for the GSM BSS and NSS:

- Configuration Management
- Fault management
- Test Management
- Performance Management
- Security Management
- Account Management

Other functions may be available depending upon the BSS or NSS manufacturer. In addition the OMC-S may also be required to perform database or user management functions on the HLR and VLR.

Basic Services Provided by GSM

GSM was designed to be a feature rich mobile services with most services based upon ISDN principles. In basic terms the GSM provides a basic set of services which can be enhanced by the use of supplementary services. The Basic Services include:

Speech, the most basic service

Short Message, a two way messaging service

Group 3 FAX, this services allows connection to Group 3 FAX machines

5 **Cell Broadcast**, this service allows messages to be broadcast to the mobile stations.

The Bearer Services include:

Asynchronous Data 300-14400 bps, allows access to normal V-Series Modems

10 **Synchronous Data 300-14400 bps**, allows access to CSPDNs

General Packet Radio Services 9600-170000 bps, a packet services allowing seamless access to the internet.

The following GSM supplementary services are currently available:

15 Call Forwarding

Call Barring Services

Call Transfer

Conference Calling

Call Wait and Call Hold

20 Calling Line Identification

Call Completion to a Busy Subscriber

Problems with Private/Public cellular networks communicating MAP via IP

25 In wireless systems, it is often necessary to exchange MAP information between the private and public cellular networks. In the case of modern voice over IP (VoIP) H.323 and other IP based networks, it is not possible to communicate using the cellular protocols such as Mobile Application Part (MAP) or A-interface protocol via SS7. Conversely, neither is it possible for the public system to

communicate using MAP or A-interface protocol with an H.323 or IP based network.

In accordance with the above background, it is an object of the present invention to provide wireless systems that are compatible with conventional
5 cellular systems and with corporate networks including local area networks and the Intranet.

Summary of the Invention

The present invention is a communication system formed by a private
10 network that includes a private wireless network. The communication system also typically includes a public wireless network using a public wireless protocol, such as GSM, and typically includes public networks, such as PSTN, ISDN and the Internet, using a wired protocol, such as IP. The private network also typically includes a local area network (LAN) and the private network typically connects to
15 the public networks using a wired packet protocol, such as IP.

In the present invention, the public and private wireless networks operate with the same public wireless protocol, such as GSM, and the private wireless network additionally operates with a wired packet protocol, such as IP.

The private wireless network uses private base stations (P-BTS)
20 which include software for a wireless protocol, such as GSM, and include software for private network operation with a wired protocol, such as IP.

The communication system permits users to operate freely in both public and private wireless networks using standard mobile stations while achieving high private network data rates. The communication system typically uses normal
25 wireless handsets or other mobile or fixed stations without need for any modifications.

The private base stations (P-BTS) in one embodiment are directly connected to a private LAN and thereby enable standard wireless stations to make

and receive calls over the LAN. Also, the range of calls, using standard Internet protocols, extends between LANs and between different corporations over the Internet without requiring the support of a switch (e.g. MSC). The wireless stations can freely roam between the public wireless network and the private wireless
5 network and a single telephone number can be assigned to a mobile station for use in both the public and the private wireless networks.

The foregoing and other objects, features and advantages of the invention will be apparent from the following detailed description in conjunction with the drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram representation of a communication system including a public wireless network, other public networks such as PSTN, ISDN and the Internet and including a private network.

15

FIG. 2 depicts further details of the private network of FIG. 1.

FIG. 3 depicts a GSM BTS architecture with added private network software.

FIG. 4 depicts a LAN interconnection of private wireless base stations (P-BTSS).

20

FIG. 5 depicts primary interface protocol stacks for IP-based private wireless base stations (P-BTS).

FIG. 6 depicts a call processing plane of software modules for IP-Based private wireless base stations (P-BTS).

FIG. 7 depicts an IP-based private wireless base station (P-BTS)
25 gate keeper plane of software modules.

FIG. 8 depicts IP-Based private wireless P-BTS OAM Software Modules.

FIG. 9 depicts a Location Registration Procedure.

FIG. 10 depicts the first phase of processing a mobile originated call.

FIG. 11 depicts the second phase of processing a mobile originated
call.

FIG. 12 depicts the first phase of processing a mobile terminated
5 call.

FIG. 13 depicts the second phase of processing a mobile terminated
call.

FIG. 14 depicts a handover operation using wireless P-BTS.

FIG. 15 depicts an Virtual Private Network (VPN) interconnection
10 to GSM Public Land Mobile Network.

DETAILED DESCRIPTION

Communication System – FIG. 1

In FIG. 1, the communication system 10 includes a conventional
15 public wireless network 15, conventional public networks 8 (such as PSTN, ISDN
and the Internet) and a private network 14. The public wireless network 15
includes the ability to communicate in a conventional manner with conventional
wireless mobile stations 4. The private network 14 includes the ability to
communicate with the conventional mobile stations 4 and provides additional
20 private network capabilities not provided by the conventional public wireless
network 15.

The conventional public wireless network 15 of FIG. 1 includes the
mobile stations (MS) 4, Base Station Sub-System (BSS) 5 and the Network
Sub-System (NSS) 6. The Base Station Subsystem (BSS) 5 is composed of the
25 Base Transceiver Stations (BTSs) 12 and the Base Station Controller (BSC) 16.
Each of the BTSs 12 includes a radio transceiver that defines the radio boundary of
a cell 11 and handles the radio (Um) interface protocols with the mobile stations 4.

The cell 11, in the wireless public network 15, of FIG. 1 each exist over a different area and together the cells 11 collectively exist over a larger area designated as a region 111. Each cell 11 in the region 111 uses frequencies that are isolated from the frequencies of other cells in the region. As mobile stations 4 travel
5 from a present cell 11 to a next cell 11, a frequency handover occurs from the frequencies of the present cell 11 to the frequencies of the next cell 11.

The private networks 14 of FIG. 1 include cells 11' (including for example cells 11'-1 and 11'-2) that each include a private P-BTS 27 for communications with mobile stations 4 located within the private networks 14.
10 Also, any of the cells 11' can be sectorized so that different areas of a cell 11' are partitioned into different sectors. For example, cell 11'-2 has six sectors 11".

The cells 11' and or sectors 11", are within the domain of the private networks 14 of FIG. 1, and also they are particular ones of the cells 11 of the public wireless network 15 of FIG. 1. In today's environment, the allocation of frequency
15 spectrum in different regions is under governmental control and is allocated to different entities in different regions of a country. The owner of the rights to particular frequencies in a region including public network 15 and private network 14 controls the allocation of frequencies among public cells 11, private cells 11' and sectors 11".

20 The Base Station Controller (BSC) 16 manages the radio resources of one or more BTSs across an Abis interface. The BSC 16 controls the radio network, including allocation of radio time slots to mobile stations 4, release of resources, interpretation of measurement results and control of radio interface handovers. The BSC 16 interfaces to the NSS 6 via an A-interface to MSC 17.

25 The Network Subsystem (NSS) 6 includes the Mobile services Switching Center (MSC) 17 that provides the functions required to switch calls to/from the mobile stations 4 and the fixed public networks 8 (including PSTN and ISDN). In addition, the MSC 17 also provides the functions needed to track and maintain

communication with mobile stations 4 and these include registration, authentication, location updating, inter-MSC handovers, and call routing to roaming mobile stations 4. The GSM system employs a Home Location Register (HLR) 19 and a Visitor Location Register (VLR) 13, an Authentication Center (AUC) secure database 2 and an Equipment Identity Register (EIR) 3. The Operations and Maintenance Center includes the OMC-R 7 and the OMC-S 9.

Private Networks – Fig. 2

In FIG. 2, private networks 14 include private networks 14-1, ..., 14-N. Private network 14-1 is typical and includes the private wireless networks 22 (including private wireless networks 22-1, ..., 22-W), local area networks (LANs) 24 (including LANs 24-1, ..., 24-L), and connection units 29 (including connection units 29-1, ..., 29-I). The private networks 14 can include wide area networks (WAN) and any other type of network presently or hereafter available. The connection unit 29 includes a hub 23 for interconnecting the private wireless networks 22 and the LANs 24 and for connecting the private network 14-1 to the public networks 8. The hub 23 connects to the router 33 that directs calls among the public network facilities including the ISDN 28, ..., PSTN 26 and the Internet 24 and the private networks 14. The private networks 14 use the same protocol as the Internet 25 and connect directly without need for a separate gateway. The connection unit 29 includes gateways 42-1, 42-2, ..., 42-G for connecting the ISDN 28, PBX 43, ..., PSTN 26 which use different protocols than the private networks 14.

In FIG. 2, the private wireless networks 22 include the wireless capabilities of the public wireless network 15 of FIG. 1. In addition, the private wireless network 15 operates with advanced technologies that are not yet available publically. Current advanced technologies operate with rates of 384kb/s and are approaching rates of 2Mb/s. In FIG. 1, wireless communications between the public

BTSS 12 and mobile stations 4 operate with a wireless protocol such as GSM. In FIG. 2, wireless communications between the private P-BTSS 27 and mobile stations 4 for convenience and comparability operate with the same wireless protocol (such as GSM) as used by the public BTSS 12 in the public wireless network 15.

In FIG. 2, the local area networks (LANs) 24 are private wired networks operating with a wired packet protocol such as IP. LAN 24-1 is typical and includes, for example, a server 25 and LAN terminals 21 (including terminals 21-1, ..., 21-T). Terminals 21-1, ..., 21-T communicate with each other and with the public networks 8 through connection unit 29 using the wired packet protocol.

In FIG. 2, the P-BTSS 27-1, ..., 27-P are associated with protocol converters 28-1, ..., 28-P, respectively, that connect P-BTSS 27-1, ..., 27-P to connection unit 23 using the private network protocol used by the LANs 24 and the router 23. Therefore, the mobile stations 4 communicating through the P-BTSS 27 in the private networks 14 have access to the terminals 21 in LANs 24 and have access to the public networks 8. Further, the P-BTSS 27 in the private wireless networks 14 have available higher data rates than those available through the BTSS 12 in the public wireless network 15. In the example described in the present specification, private rates up to 384kbps are possible whereas conventional public cellular networks only provide rates up to 64kbps. Accordingly, data retrieval operations in the private networks 14 are better accommodated than in the public wireless network 15 of FIG. 1.

In FIG. 2, the wireless P-BTSS 27 directly connect the mobile stations 4 through router 23 to other facilities in private networks 14 and thereby permit, for example, the mobile stations 4 to send and receive calls to and from the terminals 21 in the LAN networks 24. Furthermore, the range of calls from and to mobile stations 4 in the private wireless network 22, using standard Internet protocols (IP),

extends over the Internet in public networks 8 to any Internet facility such as different LANs and different corporations in different regions or countries.

The private wireless networks 22 in FIG. 2 do not require the internal support of a circuit switch from the public networks and therefore, the private networks 14 in the FIG. 2 system can easily grow to accommodate new user requirements under control of the owners of the private networks 14.

In the private networks 14 of FIG. 2, the mobile stations 4 are typically unmodified, conventional wireless mobile station handsets like those widely used in conventional public wireless networks and therefore the mobile stations 4 can freely move between the public wireless network 15 of FIG. 1 and the private wireless networks 22 of FIG. 2 without restriction. Because of this free movement capability, only a single number is required for each mobile station 4 for both private wireless network communications and for public wireless network communications.

The private wireless networks 22 of FIG. 2 have P-BTSs 27-1, ..., 27-P which correspond, for example, to the cells 11' and sectors 11" of FIG. 1. The allocation of frequencies among the public wireless network cells 11, the private network cells 11' and the private network sectors 11" is determined by agreement of the owners of the public wireless network 15 and the private networks 14.

GSM BTS Architecture – FIG. 3

In a GSM example of the present invention, the FIG. 1 public wireless network 15 includes conventional GSM basestation software 31 as indicated in FIG. 3 including the components 31-1 and 31-2. The software 31 and components 31-1 and 31-2 do not provide support for call control or connection to the private wired protocol (Internet Protocol) that is used in the private networks 14 of FIG. 1 and FIG. 2. Accordingly, the software 31 and components 31-1 and 31-2 require a protocol interface to facilitate interoperation of the wireless protocol and the wired packet protocol. For convenience, the protocol interfaces 28-1, ...,

28-P are located with the P-BTSs 27-1, ..., 27-P in the private wireless networks 14 of FIG. 2 and are described in detail hereinafter.

P-BTS Architecture Overview --FIG. 4

5 The P-BTSs 27 are in the private wireless networks 14 of FIG. 1 and FIG. 2 deployed, in one embodiment, as shown in FIG. 4. In this embodiment, each P-BTS 27 contains the required protocol stacks to perform the functions of the wireless control signaling from the mobile station 4 and the H.323 Endpoint, gatekeeper 41 or gateway 42. In this embodiment, the H.323 Endpoint can be a PC
10 based terminal 21 (see FIG. 2) or another mobile station 4. The gatekeeper 41 provides the functions necessary to control the "terminals" within the H.323 domain and, in this embodiment, "terminals" include GSM mobile stations 4.

 The H.323 gatekeeper 41 provides the functions required to register the mobile stations 4 (equivalent to Location Updating), permit access to the
15 network, translation of called numbers and routing of calls, if required. These functions are largely equivalent to those normally found in the MSC 17 or HLR 19 (see FIG. 1) of a public wireless network 15. The gatekeeper functions only need to exist in one P-BTS 27 of the P-BTS 27-1, P-BTS 27-2 and P-BTS 27-3 within the H.323 zone of FIG. 4. In the FIG. 4 example, P-BTS 27-3 provides the
20 gatekeeper function within the H.323 zone of FIG. 4 and supports the operation of P-BTS 27-2 and P-BTS 27-1.

 In order to support the full range of wireless functions, a the functions of a standard H.323 gatekeeper are augmented. The redesign includes the addition of a Local User Database (LUDB) 6-6 (See FIG. 6) to control the mobile
25 station and provide Supplementary Services (SS) functionality. The gatekeeper database contents are transferred to the serving P-BTS when the mobile station 4 registers (that is, Location Updating has taken place) on a P-BTS. For example, if a mobile station 4 has registered on P-BTS 27-1 in FIG. 4 and the user data of

mobile station 4 is stored with the gatekeeper 41 supported by P-BTS 27-3, then the relevant contents of the user database in P-BTS 27-3 are transferred to P-BTS 27-1 when the registration takes place. Any updates or alterations to the data by interaction of mobile station 4 are reflected back to the main gatekeeper database
5 7-3 stored in the gatekeeper 41 (See FIG. 7). This approach reduces the amount of call control signalling that is required within a LAN and provides redundancy for increased reliability.

In order to provide external PSTN or public wireless network interconnection, an H.323 gateway 42 is provided in FIG. 4. The gateway 42 is part
10 of the normal VoIP LAN-PSTN operation. The gateway 42 provides line interface and transcoding functions that allow the voice and data traffic to be sent to existing networks (for example, PSTN, ISDN, B-ISDN, PBX).

An additional function required of a P-BTS 27 when used in a LAN environment of FIG. 4 is the ability to control the handover of mobile stations 4
15 between different P-BTSs 27 as mobile stations 4 move around within the LAN zone serviced by the private networks 14 of FIG. 4 and FIG. 2. The handover decision is made internally within each P-BTS 27, only the signaling necessary to command a handover needs to go between the P-BTSs 27.

20 Protocol Stacks for Signaling – FIG. 5

To support the architecture, the standard GSM stack 31 of FIG. 3 is modified by the P-Network Software 32 as shown in the FIG. 5. In FIG. 5, the components 31-1' and 31-2' are equivalent to the components 31-1 and 31-2 in FIG. 3. As can be seen from FIG. 5, in addition to the private Wireless Air Interface
25 requirements and the H.323 Terminal Equipment requirements, the LAN based P-BTS 27 also provides the following functionality:

Interworking between the two Call Control Functions –
private wireless and LAN based

Private Wireless Mobility Management (there is no BSC or MSC in stack 31 of FIG. 3).

The Call Processing Plane Software Modules are significantly more complicated than those found in a normal public BTS and are defined in FIG. 6.

5

Call Processing Plane Software Modules for IP-Based P-BTS – FIG. 6.

In FIG. 6, the software modules for the call processing plane include modules used for IP-based operation of P-BTSs 27 as follows:

10 **Call Control Module** – The module 6-1 is responsible for the “call feature control” function for the mobile station, including both basic Call Control (CC) as well as Call Related Supplementary Services (CRSS). The CRSS handled by this module include:

15 Calling Line Identification Presentation (CLIP)

 Calling Line Identification Restriction (CLIR)

 Connected Line Identification Presentation (COLP)

20 Connected Line Identification Restriction (COLR)

 Call Forwarding Busy (CFB)

 Call Forwarding No Reply (CFNR)

 Call Forwarding Unconditional (CFU)

25 Call Waiting (CW)

 Call Hold (HOLD)

 Multi-Party Service (MPTY)

The Call Control Module is not merely an “interworking between the private Wireless Call Control and ISDN Call Control messages.” It is required to carry out the feature control functions, such as connecting voice path, providing tones and announcements when call is not answered, working with Private gatekeeper entity in the local zone to obtain appropriate resource (e.g. conference circuit), forwarding a call, and managing call waiting and call hold features.

5

10

Tone and Announcement Module – The module 6-2 handles the actual generation of the various tone and announcement used according to the Call Control based on different call handling situation. Tone and Announcement are usually played towards the “far-end” this will be the LAN direction in this case, where only a tone is played toward the local Mobile Direction.

15

20

Mobility Management Module – The module 6-3 is responsible for handling the Mobility Management Function of the mobile station, including location update and handover control/co-ordination. This function was originally located in the private wireless MSC and is fulfilled in the IP-based P-BTS. It also provides the ability to find a terminating mobile station and the ability to handle the call when the mobile station moves from one P-BTS to another P-BTS.

25

System Control Module – The module 6-4 is responsible for the End-Point registration, Administration, and status reporting in LAN. This entity is the “end-point” function and does not

cover the gatekeeper functions which may be resident on the same P-BTS as well.

CISS Controller Module – The module 6-5 controls all the Call Independent Supplementary Services (CISS) for the mobile station that is registering through or served by the current P-BTS. The services include:

5

Subscriber activation/deactivation of various supplementary features, such as call waiting, call hold, call forwarding, etc.

10

Subscriber programming of the supplementary Service, such as the forwarded-to number when the mobile station is busy.

15

Most of the CISS features are of the interrogation type with the subscriber setting information in the domain user database. This module is responsible for updating the local user database(LUDB), while the LUDB is responsible for ensuring the changes are carried back to the domain user database (an HLR like database in the gatekeeper) correctly.

20

Local User Database Module (LUDB) – The module 6-6 maintains a copy of user data for each of the mobile stations that is registered on the current P-BTS. The data is stored in local memory as a “cache.” Any changes to the local copy will be “written -back” to the domain user database automatically. All the other modules who need the user data to operate interact with the Local User Database module for

25

the data interrogation. The Local User Database Module will interact with the Domain User Database Module when necessary and does it in a way that is transparent to all the other modules in the P-BTS.

5 **RIL3-CC Encoder/Decoder Module** – The module 6-7 is responsible for encoding and decoding the GSM Radio Interface Layer3 Call Control messages.

10 **RIL3-MM Encoder/Decoder Module** –The module 6-8 is responsible for encoding and decoding the GSM Radio Interface Layer3 Mobility Management messages.

15 **H.225.0 RAS Encoder/Decoder Module** – The module 6-9 is responsible for encoding and decoding the H.225.0 Registration Administration and Status (RAS) messages. This module is shared between Call Processing Plane and the gatekeeper Plane.

H.225.0 CC Encoder/Decoder Module – The module 6-10 is responsible for encoding and decoding the H.225.0 Call Control messages. The H.225.0 Call Control Message is based on ISDN Q.931 Message Set.

20 **H.245 Encoder/Decoder Module** – The module 6-11 is responsible for encoding and decoding the H.245 messages. The H.245 specification defines a set of messages for controlling the allocation and management of the logical channels for multimedia applications.

25 **RRM Module** – The module 6-12 is responsible for the entire Radio Resource Management functionality that is normally split between the BTS and the BSC in the traditional architecture. The RRM Module will directly interface with

the Call Control Module for radio resource functions, such as channel set-up, paging, etc.

RIL3 Message Delivery Module – The module 6-13 is responsible for looking into the protocol discriminator field in the layer-3 message header to determine which module has to process this message. The delivery of the CC message will now be sent to the RIL3-CC Encoder/Decoder Module, and the MM message to the RIL3-MM Encoder/Decoder Module.

SMS-PP Controller Module – The module 6-14 is responsible in handling the Point-to-Point SMS messages that are to be delivered to the target mobile station.

SMS-CB Controller Module – The SMS-CB module 6-15 is used to keep track of the functionality of receiving and distributing the SMS CB messages that are to be broadcast by all or part of the P-BTSs within the current H.323 Zone.

Frequency Hopping Control Module – The module 6-16 controls the frequency of communications for the target mobile station.

RIL3-RR Encoder/Decoder Module – The module 6-17 decodes and encodes the RIL3-RR messages to and from the BTS internal RR message formats. The formats of the RIL3-RR messages are specified in the GSM Technical Specification 04.08 along with the RIL3-MM, RIL3-CC, RIL3-SS, and RIL3-SMS messages specifications. This module provides the encoding and decoding of the RIL3-RR message which is required for the P-BTS.

5 **BTS Power Control Module** – The module 6-18 is responsible for providing the P-BTS power control (down-link) both statically and dynamically. The P-BTS Power Control Module takes the Mobile Uplink Measurement Data that is sent from a mobile, that is in dedicated mode, and compiled to provide the best power adjustment strategy for the given mobile. The goal is to maintain the P-BTS power in the optimal level so that the signal strength and signal quality for the down-link signal is within the private wireless quality guideline without causing excessive interference to the adjacent cell sites that are using the same or adjacent frequencies.

10 **MS Power Control Module** – The module 6-19 interfaces with the Channel Encoding and Decoding to add/retrieve the power control information into/out-off the header fields of the Layer 1 messages. The retrieval of the Mobile's up-link power level and the encoding of the command to instruct Mobile Station to increase/decrease the output power should be separated from the intelligence of performing sliding window algorithm over Mobile's power level and making decision to increase or decrease the MS power level.

15 **BTS Measurement Report Module** – The module 6-20 interfaces with GSM burst processing components to obtain the P-BTS measurement of the Mobile uplink signal. Specifically, the Automatic Gain Control and Demodulator for uplink power-level, and the Channel decoding unit for signal quality. Depending on the actual hardware architecture the

input may come from more than just the three components identified above.

5 **Timing Advance Module** – The module 6-21 interfaces with the Burst Format function and retrieves the burst delay information for the Mobile, and then interfaces with the Channel Encoding and Decoding to add the Mobile timing advance information into the layer-1 header field. The Timing Advance Module can be treated as part of the Traffic Channel Processing Domain or as part of the Call Processing Domain. It autonomously monitors the delay of the arriving burst and instructs the burst formatting function to encode the amount of timing-advance that the mobile station needs to do in order to let the burst arrive within the burst envelope that the BTS is expected.

10 **LAPDn Module** – The module 6-22 interfaces the message delivery to the channel coding/decoding.

IP-based P-BTS Gate Keeper Plane Software Modules—FIG. 7

In FIG. 7, the gatekeeper plane for gatekeeper 41 of FIG. 4 contains
20 the modules which realize the wireless gatekeeper functionality as well as a combined Local/Domain User Database. Only one P-BTS 27 within each zone normally will have this plane activated. It is also possible to have the gatekeeper 41 run in a dedicated mode without sharing the responsibility of a P-BTS function. Therefore, logical separation is maintained between the two entities even though
25 they are expected to co-exist in the same hardware platform for many deployment scenarios. The IP-based P-BTS Gate Keeper Plane Software Modules include:

Gatekeeper Module – The module 7-1 is responsible for the gatekeeper functionality as stated in the H.323 Specification.

In one embodiment, the P-BTS may contain a gatekeeper entity along with an End-Point entity. Even though the gatekeeper is almost always consulted by the Call Control and System Control entities in the end-point, the above diagram does NOT show a direct connection among them. If all the entities are co-located in the same P-BTS, the traffic will actually go all the way to the IP layer, through the IP loop-back driver, and back to the correct entity.

Domain User Database Module – The module 7-2 maintains the Mobile User's database for the "Home Zone." It is similar to the functionality provided by the GSM HLR, but without using GSM MAP for accessing the content of the database from the GSM MSC. The Domain User Database (DUDB) is responsible for communicating with the Local User Database Module (LUDB) to provide a "cached copy" of the user data when the mobile station performs a location update through the serving P-BTS. The Domain User Database Module will be responsible for informing the Local User Database Module about the changes to the user data when that happens. These include the delivery of Point-to-Point Short Messages to the mobile station, the update from the network operator in changing the subscription information of the mobile user, and Mobile User performs another location update. Changes can be triggered in reverse direction from the Local User Database to the Domain User Database, such as Mobile User performs a Call Independent Supplementary Service to program its supplementary services. In all cases, the Domain

User Database Module in the Gate Keeper only interacts with the User Local Database Module in the P-BTS and not the various Call Control or CISS Modules directly.

Gate Keeper Database Module – The module 7-3 maintains the gatekeeper's database regarding all the mobile stations in the same zone as well as information regarding other gatekeepers in the connected network.

SMS-PP Controller Module – The module 7-4 is responsible in handling the Point-to-Point SMS messages that are to be delivered to the target mobile station. The module 7-4 is the same as the module 6-14 in the Call Processing Plane of FIG. 6.

SMS-CB Controller Module – The SMS-CB module 7-5 is used to keep track of the functionality of receiving and distributing the SMS CB messages that are to be broadcast by all or part of the P-BTSs within the current H.323 Zone. The module 7-5 is the same as the module 6-15 in the Call Processing Plane of FIG. 6.

H.225.0 RAS Encoder/Decoder Module – The module 7-6 is the same as the module 6-9 as described in the Call Processing Plane of FIG. 6.

IP-Based P-BTS OAM Software Modules – FIG. 8

The OAM Software Modules for the IP-Based P-BTS uses an SNMP based Management Information Base (MIB). The new modules beyond those found in a normal public BTS are as follows:

SNMP Protocol Stack Module – The module 8-1 is the SNMP protocol stack as used to control the SNMP MIB.

SNMP Agent – The module 8-2 provides the agent side code to perform the action request from the SNMP manager via the SNMP protocol.

5 **SNMP MIB Controller Module** – The module 8-3 is responsible for maintaining the SNMP MIB (a logical view, from maintenance perspective, for all the resources) for the P-BTS. The remote OAM commands from, for example an OMC-R are all carried out via changes to the MIB. The MIB controller then interprets the changes and performs the maintenance actions. Alarm and Performance reports from the P-BTS will also be collected and stored in the MIB. This module handles all the SNMP MIB, including additional configuration and controlling attributes for the H.323 aspects of the P-BTS. Furthermore, the CC and MM functionality and RR functionality is also managed by this module.

10

15

Initialization and Task Control Module – The module 8-4 is responsible for handling the initialisation of all the other Software Modules, establishing communication, and monitoring the health of all these processes through heart-beat (keep-alive timer) mechanisms.

20

Network Operations

25 This section describes several scenarios to demonstrate how an Intranet-based P-BTS 27 using the modules described above and deployed as shown in FIG. 4 provides the same type of services that are normally provided by a public cellular system that is based upon the conventional GSM architecture. The

following scenarios are representative of those required for the support of cellular service and other scenarios can be constructed from these building blocks.

Mobile Terminal Registration (Location Updating)

Private Terminal in Private Domain

5 Private Terminal in Public Domain

Public Terminal in Private Domain

Private Mobile Originated Call to:

Private Mobile or Fixed Terminal Located in Private Domain

Private Mobile or Fixed Terminal Located in Public Domain

10 Public Mobile Located in Private Domain

Public Mobile or Fixed Terminal Located in Public Domain

Mobile Terminated Call from:

Private Mobile or Fixed Terminal Located in Private Domain

Private Mobile or Fixed Terminal Located in Public Domain

15 Public Mobile Located in Private Domain

Public Mobile or Fixed Terminal Located in Public Domain

Handover within the LAN based P-BTS network.

It has been assumed in all the scenarios described below that the P-BTS handling the call has already performed the required registration phase with its "local" wireless gatekeeper 41 entity(See FIG. 4). It should also be noted that the P-BTS 27 handling the call may also be another P-BTS acting as the gatekeeper within the domain.

In the scenarios described below the following assumptions and definitions are used:

25 **A *Private Network*** in the cases described below is a network based upon the P-BTS running with the modules described above. The user data for the mobile stations is located in the private network gatekeeper 41 (See FIG. 4).

5 A **Private Network Operator** is considered to be the owner (for example corporation or other entity) of the private network including the P-BTS units. It may be that the private wireless network is managed by the public network operator with guidance from the private network owner.

10 A **Private Mobile** is a wireless station that is serviced by the private network. The mobile station is also permitted to roam into the domain service by the public wireless network depending upon agreements between the operator of the public wireless network and the owner of the private network.

15 A **Private Fixed Terminal** is a terminal that is located on the LAN or attached PBX that is fixed in location. This may also be a normal fixed PBX phone or a phone attached to a desktop PC.

20 A **Public Network** is a normal public wireless network under the control of a licensed operator. The network contains the usual cellular entities such as MSC, VLR or HLR..

25 A **Public Wireless Station** is a wireless station that is primarily located on the cellular public wireless network. The mobile wireless station may also be permitted to roam into the private wireless domain depending upon agreements between the operator of the public wireless network and the owner of the private network. The user data for this mobile user is located in the Public Network operators HLR.

 A **Public Network Operator** is considered to be the licensed owner of a public wireless network into which the domain of the private wireless network falls as related to the relevant spectrum.

In the cases described below, it is assumed that the mobile station 4 is a standard wireless station that need not have been modified. In such a case, the wireless station is a subscriber, having an Identity Module (SIM) card to identify the subscriber and contains a unique International Mobile Equipment Identity (IMEI).

5 In the descriptions below, it is assumed that the "network" is capable of performing number translations that allow calls to reach the private network gateway 42 (See FIG. 4) or the relevant public cellular network. This assumption implies that the wireless station number is unique within the national numbering plan.

10

Mobile Terminal Registration

The registration operation needs to be performed for three different scenarios:

Private Terminal in the Private LAN Zone.

15

Private Terminal in the Public Wireless Network.

Public Terminal in the Private LAN Zone.

20 Within each of these scenarios there are several variations that may be considered. In particular, one of the major items that will impact the operation of the private network is the varying registration requirements that may be placed on the private mobile station 4. In each of the sections below, the possible options are discussed in terms of the differences between the private network procedure and/or the normal public cellular network procedure.

Private Terminal Registration in the Private H.323 Zone

25 The terminal registration phase in the private LAN network is designed to appear identical to that found in a Public Wireless Network as far as the Private mobile station is concerned. In order to accomplish this operation, the P-BTS is required to broadcast, on the Broadcast Control Channel (BCCH), the same type

of information as is found in a "normal" public wireless network 15. When the terminal detects and decodes the broadcast channel information, it can then perform the usual registration function as shown in FIG. 9. The registration function in this case would be terminated at the wireless gatekeeper database. As an alternative, 5 the wireless gatekeeper can also contact a Public HLR database to retrieve the User data for use by the P-BTS.

The signaling between the P-BTS and P-BTS/gatekeeper function uses the standard H.323 Registration Request (RRQ) message sequence. If the RRQ sequence fails, then a Location Reject messages is used to terminate the procedure 10 with the mobile station. The sequence shown in FIG. 9 is made up of a number of phases as follows.

Phase 1: This phase is the normal Location Update request made by the mobile station when it detects its Private (home) network. In this case the Mobility Management (MM) layer in the P-BTS will 15 terminate the signaling for this message.

Phase 2: When the MM receives the Location Update request it must initiate a registration with the private wireless gatekeeper. In order to perform this operation H.323/RAS signaling is used to send a Registration Request (RRQ) to the private wireless gatekeeper. The 20 RRQ message will contain the IMSI of the registering mobile station, Call Signal, RAS and H.245 Transport Addresses for the P-BTS.

If the IMSI associated with the Private mobile station is already registered with this serving P-BTS then the registration, as 25 an option, need not be checked with the gatekeeper. However in this case it would be more usual to expect an "IMSI attach" rather than a Location Update request.

If the TMSI security option is to be used within the Private domain then on first registration it will be necessary to retrieve the IMSI if the Location Area Identifier (LAI) is not recognized by the P-BTS receiving the Locate Update request.

5 **Phase 3:** When the gatekeeper receives the RRQ it will check that the IMSI (or TMSI+LAI) presented in the RRQ is permitted to register on the Private Network. This function allows the Private Network Operator to control access to the network. It is possible to enable or disable access to the network for Private or Public network users.
10 After checking the IMSI the private wireless gatekeeper may take several actions dependent upon how the system has been configured.

15 If the IMSI belongs to a Private mobile station and the user data for that mobile station is located in the gatekeeper database then the gatekeeper can return a Registration Confirmed (RCF) message to the requesting P-BTS. If the Private mobile station is already associated with another address (e.g. another P-BTS) then the gatekeeper can perform an Unregister Request (URQ/UCF/URJ) sequence to the old P-BTS address in order to
20 eliminate duplicate information. It should be noted that this operation sequence for the H.323 stack is unique to this implementation of the Invention.

25 If the IMSI belongs to a Private mobile station and the user data for the mobile is not located in the gatekeeper then the gatekeeper requests the information for this user from another gatekeeper located elsewhere within the Private network. This requires the transfer of data to this gatekeeper before the processing can continue as described above.

5 If the IMSI belongs to a Public mobile station or to a Private mobile station required to use the Public HLR then the gatekeeper requests the relevant database information from the Public Network HLR via a suitably modified Private wireless gateway. The Private to Public gateway in this case takes the internal H.323 signaling and translate that into Private wireless specific signaling for interworking with the Public Network HLR. In this case the data is relayed to the serving P-BTS. It also possible that the Public Network HLR will reject the request in which case the Location Update request from the Mobile User must also be rejected. If the HLR accepts the request then it must store the E.164 number of the "gateway" in order to deal with Mobile Terminated Calls.

10 **Phase 4:** After the registration phase has been completed the data must be transferred from the Private wireless gatekeeper to the Serving P-BTS. In FIG. 9 this is shown by the TFTP message, however this is only used as an example other techniques could be used dependent upon the amount of data to be transferred. If small amounts of data are to be moved then it could be added to the RCF message or an new message could be used based on the H.323 "Non Standard Message" option. The exact option used does not affect the outcome required by this invention.

20 **Phase 5:** Once the data has been transferred to the serving P-BTS the registration procedure can be completed to the mobile station.

Location Registration Procedure – FIG. 9

In FIG. 9, the private mobile station registration in Public GSM PLMN is depicted. The exact method used to register the private mobile station in the Public Network will depend upon the network configuration. Two options are described below where it is assumed that the private mobile station is permitted to register in the Public Network.

Private Network Database: If the user data is held in a Private Network database on the Private wireless gatekeeper, as outlined above, then when the Private mobile station registers in the Public Network the serving MSC will have to access this database via the gateway function. The Private wireless gatekeeper will retain the MSC and/or VLR Number in this case for use with Mobile Terminating Calls.

Public Network Database: If the user data is held in the Public Network HLR, then the registration procedure is as per a normal GSM registration procedure.

Public mobile station Registration in the Private H.323 Zone: In the case of the Public mobile station registering in the LAN zone, the Private wireless gatekeeper interrogates the Public Network HLR that is the home location for the public mobile station.

Mobile Originated Call – FIG. 10 and FIG. 11

Four variations of the Mobile Originated Call (MOC) need to be considered and these are MOCs which is directed to:

- Private Mobile or Fixed Terminal Located in Private Domain*
- Private Mobile in Public Domain*
- Public Mobile Located in Private Domain*
- Public Mobile or Fixed Terminal Located in Public Domain*

The Mobile Originated Call (MOC) case is the most difficult in terms of determining the destination of the call and how it is to be routed. The sections below detail how this route determination is to be undertaken.

5 **Mobile Originated Call to Private Mobile or Fixed Terminal Located in Private Domain**

A Private Mobile User making a Mobile Originated Call would see the call procedure as "identical" to the procedure found in a normal public Wireless Network, the call flow is illustrated in FIG. 10 and FIG. 11. The signalling
10 between the P-BTS and Private wireless gatekeeper function would use the standard H.323 message sequences. The call flows shown in FIG. 10 and FIG. 11 is made up of a number of phases:

Phase 1: This phase is the normal CM Service request made by the mobile station when it wishes to make a Mobile Originated Call. In this
15 case the Mobility Management (MM) layer in the P-BTS will terminate the signalling for this message.

Phase 2: The normal call establishment now continues with the mobile station sending a SETUP message including the Called Party Number (CPN). The Connection Management (CM) layer is
20 responsible for initiating the call into the network.

Phase 3: The CM layer will begin the access process in the H.323 stack by using the RAS Admission Request (ARQ) sequence towards the P-BTS/gatekeeper. The purpose of this sequence is to both locate the terminating party and request LAN bandwidth for use in the call.
25 In a small or isolated network the ARQ sequence may be redundant, however it would permit easy co-existence when the P-BTS resides in more heavily loaded networks, it would also allow the gatekeeper to easily apply QoS procedures to the P-BTS. The ARQ generated

by the P-BTS will contain the CPN. The CPN number is used by the gatekeeper to determine the process to be followed in establishing the call. The exact process may be operator specific and is not described in this invention.

5 The required routing information for the H.323/Q.931 SETUP message can be returned to the serving P-BTS in the ACF message. If the information cannot be resolved or other checks on the originating party fail then the call sequence may be rejected at this point and the call terminated.

10 **Phase 4:** Upon receipt of the ACF the serving P-BTS can now route the H.323 SETUP message to the destination. It should be noted that the destination may apply call forwarding or other forwarding operations. As soon as the H.323 Call Proceeding is received the CM layer can proceed with the call processing towards the mobile station.

15 **Phase 5:** When the H.323 Call Proceeding message has been received by the H.323 stack establishment of the audio channel can begin. This is undertaken by the Terminal Capabilities, Master/Slave and Bi-Directional Channel Open (B-OpenChn) sequence. This will
20 allow conversation as soon as the mobile station has been assigned to a radio Channel, thereby avoiding any speech clipping problems.

Phase 6: The completion of the call will begin with the sending of a Call Proceeding message to the mobile station. This can then be followed by an assignment of the mobile station to the traffic
25 channel (TCH). The Alerting and Connect sequence are then used to complete the call establishment process.

In establishing this call it has been assumed that the terminating party is either a Private mobile station or Private Fixed Terminal within the same H.323

area. In this case, the Terminal Capabilities negotiation process takes care of selecting the correct code.

In FIG. 10 and FIG. 11, the operation of a Mobile Originated Call to a Private mobile station Located in Public Domain is represented. If the Mobile Originated Call is to another Private mobile station which is now registered on the Public Domain, there are two possible options depending upon how the user data is stored in the network. If the user location data is stored by the Private wireless gatekeeper, then the addresses necessary to route the call will be returned in the ACF, which should point to the Public MSC/VLR serving the Private mobile station. If the user location data is stored in the Public Cellular network HLR then the gatekeeper will either have to request the location data from the Public HLR or simply route the call directly to the gateway then to the nearest MSC. Therefore the routing data for the call will be provided directly by the HLR or indirectly via the MSC. In all of these cases the H.323 SETUP message will be routed to the gateway entity for routing to the external network. In this case it will also be necessary to use the transcoding functions of the gateway entity.

Public Mobile Located in Private Domain

If the Mobile Originated Call is to Public Mobile which is now registered on the Private Domain there are two solutions depending upon how the user data is stored in the network. If the Public user location data is stored by the Private wireless gatekeeper, this pointer is used to "short circuit" the need to interrogate the Public HLR and the addresses necessary to route the call is returned in the ACF, which points to the P-BTS serving the Public mobile station. In this case, the H.323 SETUP message is routed directly to the P-BTS serving the Public mobile station.

If the user location data is stored in the Public HLR, then the Private wireless gatekeeper requests the location data from the Public HLR. This operation provides the routing data for establishing the call via the H.323 gateway. In this

case, the gateway is responsible for determining the location of the Public User. Therefore, in practice, the scheme mentioned in the previous paragraph is optimum in terms of signalling performance since the gatekeeper only needs to interrogate the Public HLR if the Public mobile station cannot be found in the Private Network.

5

Public Mobile or Fixed Terminal Located in Public Domain

If the Mobile Originated Call is to a Public mobile station or Fixed Terminal located in the Circuit Switched Telephone (CST) domain, then the routing of the call is directly to the gateway. However it may be that in order to speed up the establishment of the call, the Private wireless gatekeeper will search for the CPN on the Private Network first before routing the call to the gateway. The gateway is then responsible for signalling and providing the necessary transcoding functions.

Mobile Terminated Call – FIG. 12 and FIG. 13

The Mobile Terminated Call needs to be performed for four different scenarios:

Private Mobile or Fixed Terminal Located in Private Domain

Private Mobile or Fixed Terminal Located in Public Domain

Public Mobile Located in Private Domain

Public Mobile or Fixed Terminal Located in Public Domain

The Mobile Terminated Call (MTC) case is the most straightforward call scenario. In most of the above cases, the call flows are identical; the only difference being the terminating point and the signalling required to reach that point.

Private Mobile or Fixed Terminal Located in Private Domain to Private Mobile

This case covers two scenarios, calls from another fixed computer terminal using H.323 and calls from another Private mobile station. In both of these cases,

the call flows are identical, once the destination address of the Private mobile station has been determined. The call flows shown in FIG. 12 is made up of a number of phases:

- 5 **Phase 1:** The initial phase of a Mobile Terminated Call establishment is started by the arrival of the H.323 SETUP message from the calling party on the well known Q.931 Signaling address in the P-BTS. The CPN number in the SETUP message is then used to lookup up paging information for the Private mobile station. The H.323 Call Proceeding message is returned to the originating endpoint.
- 10 **Phase 2:** The normal Paging request is now made to the mobile station when the Private Network wants to make a Mobile Terminated Call. When the mobile responds to the Page Request the normal Authentication and Cipherring procedures can be performed. During this time it should be possible for the RAS layer to begin the ARQ
- 15 sequence with the registered gatekeeper in order to reserve the required bandwidth.
- Phase 3:** The GSM call establishment procedures now continue with the mobile station receiving a SETUP message including the Bearer Capabilities for the call being established, this is required to make
- 20 sure the mobile station can correctly determine the type of call. For example, an MTC Data call may require a modem to be enabled in the mobile station. When the Call Confirmed message is received from the mobile station then the H.323 stack can then proceed with the LAN part of the call.
- 25 **Phase 4:** When the H.323 stack receives the Call Confirmed message from the mobile station the H.245 layer should begin the necessary Terminal Capabilities, Master/Slave and Bi-Directional Channel

Open (B-OpenChn) sequence in order to establish the RTP/RTCP transport link between the endpoints.

5 **Phase 5:** In this phase the mobile station can now return the Alerting and Connect messages which are forwarded to the originating endpoint in the Private Network. Upon receipt of the CONNECT message the CM layer can request the assignment of the required radio resources.

10 In establishing this call it has been assumed that the terminating party is either a Private mobile station or Private Fixed Terminal within the same H.323 area. In this case, the Terminal Capabilities negotiation process takes care of selecting the correct code.

The call release scenario is also given in FIG. 13.

Private Mobile or Fixed Terminal Located in Public Domain

15 In the case of a Fixed Terminal Circuit Switched Telephone (CST) call to a Private mobile station on the private network, the call is first routed to the nearest H.323 gateway by the PSTN/ISDN network (this may depend on local regulations). The gateway will then be required to interrogate its local Private wireless gatekeeper, which may have to interrogate other gatekeepers, in order to find the
20 required routing information. Once the routing information has been returned, then the call can be established through the Intranet to the terminating P-BTS.

Public Mobile Located in Private Domain

25 In the case of a Public mobile station located in the Private Network the first requirement is to locate the destination address of the called mobile. This would involve the serving P-BTS interrogating its registered Private wireless gatekeeper to determine the routing address. Once the routing address has been determined the call can be routed to the terminating mobile.

Public Mobile or Fixed Terminal Located in Public Domain

In the case of a Fixed Terminal CST call to a Private mobile station on the private network the call is first routed to the nearest H.323 gateway by the PSTN/ISDN network (this may depend on local regulations). The gateway will
5 then be required to interrogate its local Private wireless gatekeeper, which may have to interrogate other Private wireless gatekeepers, in order to find the required routing information. Once the routing information has been returned then the call can be established through the Intranet to the terminating P-BTS.

10 **Handover Operation With P-BTS – FIG. 14**

In FIG. 14 details of a handover operation are shown. The handover scenarios fall into the following categories:

Intra-Private Network Handover.

Inter-Private Network Handover

15 *Private to Public Network Handover*

Public to Private Network Handover

The first two cases are dealt with in the next section as they are very similar. The last two cases are not described in detail since they can be built from the first two.

20 *Intra-Private Network Handover Inter-Private Network Handover*

In order to provide continuous coverage within the private domain (Intranet), it is necessary to be able to perform at least intra-domain and inter-domain handovers. In order to simplify the implementation of the network, the P-BTS performs the handover candidate calculations on the measurement data
25 being sent by the mobile station. Once a handover candidate has been identified and the decision made, then the process to begin the handover needs to be started. There are several methods used to facilitate the handover process. The simplest solution is to use the conference facilities of H.323 and the resources of the

gatekeeper/Multi-Conference Unit (MCU) to bridge the old P-BTS and the target P-BTS. Another method uses the multicast options of the Intranet to send the uplink and downlink IP packets to both the old and new P-BTSs. In either case, the target P-BTS enables the new radio interface, prepares to take over the mobile
5 station Call Control state machine and establishes the necessary routing to access the network. Once the new radio channel has been established, the terminal is instructed to move to the new P-BTS and the old P-BTS resources are released. If each P-BTS used a different LAI, then location updating (registration) is automatically performed when the call terminates. In performing the handover as
10 shown in FIG. 14, the following phases are undertaken:

Phase 1: Once the handover algorithm has determined that a handover is required then the transport addresses of the new base station must be determined. The new base station address is determined by making use of the RAS Location Request with the BTS ID as the
15 addressed party. When appropriate this operation is extended to include the locations of BTSs within the Public GSM network.

Phase 2: If the gatekeeper knows the transport addresses of the Target BTS (EP3) then it is returned in the Location Confirm (LCF) message. At this point the Old BTS (EP1) must request the
20 resources from the Target BTS. The resource request is performed by adding a new "Non-Standard Message" to the H.323 repertoire. This new message requests the resources from the Target BTS. This message may also include call control information appropriate to this mobile station. In addition, to speed up the location updating
25 process, it may also include the Old BTSs copy of the user data.

In the case of a handover to the Public network then the "Non-Standard Message" would have to be sent to the gateway and converted into the appropriate Handover message for the public

network. The gateway would also have to start handling the call for the Old BTS.

Phase 3: When the Target BTS receives the request for the resources, if they are available then it will respond with a confirmation and a multicast address to be used by the Old BTS.

Phase 4: Upon receiving the confirmation the Old BTS begins to establish a conference between the destination BTS (EP2) or Fixed Terminal and the Target BTS. Once the multicast distributed conference has been established the Old BTS can instruct the mobile station to handover to the Target BTS.

Phase 5: The Handover Command is sent to the mobile station which will then begin to access the Target BTS on the indicated timeslot. Once the mobile station is established on the Target BTS an End Session message is sent to the Old BTS to release the resources from the BTS. The Call Control is now located on the Target BTS.

In order to accommodate different handover cases, the P-BTS determines via the BTS ID whether Synchronized or Non-synchronized handover is to be used.

It should be noted that this procedure is equally applicable to both Private and Public mobile stations. This procedure also forms the basis for any scheme which requires handover to/from the Public GSM network.

VPN Interconnection To GSM PLMN – FIG. 15

In FIG. 15, a P-BTS Virtual Private Network (VPN) 34 formed by the P-BTSs 27-1, 27-2 and 27-3' interconnects to GSM PLMN 26 through hub 23 and router 33 to the Internet 24. In FIG. 15, the wireless gatekeeper 41' is part of the P-BTS 3 27-3'. The gatekeeper 41' communicates with the Public Cellular HLR 19 using a reduced form of the normal Public Wireless Cellular Signaling system. The HLR 19 can then be contacted using the Internet over a dedicated trunk line from

a gateway. The trunk lines connect the H.323 gateway to the MSC and then to the HLR 19. At the HLR 19, an IP SS7 translator is used, to convert the incoming control signalling riding on IP to be sent over SS7 and vice-versa. In order to efficiently support private/public roaming, the IP to SS7 translation entity is best co-located with the Public Cellular Network HLR 19, where it can be used to service many private networks such as networks 14'-1, ..., 14'-M as well as private network 14-1 in FIG. 15. Using this scheme, Public-to-Private and Private-to-Public roaming is easily performed. The IP/SS7 translator is available from many manufacturers. This function is also used to transport Short Messages to and from the Private/Public domain.

The support of handover is achieved with the addition of handover support in the gateway entity and an IP-to-SS7 convertor co-located with the nearest MSC. This addition allows handover messages to be passed to and from the MSC, via the H.323 gateway and then to the serving P-BTS.

15

While the invention has been particularly shown and described with reference to preferred embodiments thereof it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention. Some terms used in the specification are set forth in the following GLOSSARY.

20

GLOSSARY

	ALS	Alternate Lines Selection
	ARS	Automatic Route Selection
	CAR	Call Detail Record
5	CC	Call Control
	DHCP	Dynamic Host Configuration Protocol
	DNS	Domain Name Server
	GoIP	GSM over IP
	GSM	Global System for Mobile Communications
10	HTML	Hyper Text Markup Language
	IMEI	International Mobile Equipment Identity
	IMSI	International Mobile Subscriber Identity (based on E.212 numbering)
	IrDA	Infra red Digital Access
15	ISDN	Integrated Services Digital Network
	Java	Programming language from Sun Microsystems
	LAI	Location Area Identifier
	LCR	Least Cost Routing
	MIB	Management Information Base
20	MM	Mobility Management
	MS	Mobile station
	MSIDN	Mobile station ISDN Number
	NNTP	Network Time Protocol
	OAM	Operations, Administration, & Maintenance
25		
	PDA	Personal Digital Assistant
	PLMN	Public Land Mobile Network
	RR	Radio Resource

SMS – CB	Short Message Service – Cell Broadcast
SMS –PP	Short Message Service – Point-to-Point
SNMP	Simple Network Management Protocol
SNTP	Simple Network Time Protocol
5 TMSI	Temporary Mobile Subscriber Identity
VPN	Virtual Private Network

CLAIMS

1 1. A communication system having
2 a private network including,
3 a private wireless network operating with a wireless protocol for
4 communications with wireless stations,
5 a private wired network operating with a wired packet protocol for
6 communications with terminals,
7 connection means for interconnecting the private wireless network
8 and the private wired network,
9 interface means for interfacing the wireless protocol and the wired
10 packet protocol whereby wireless stations operating with the
11 wireless protocol communicate with the wired packet
12 protocol.

1 2. The communication system of Claim 1 wherein said wireless protocol is GSM.

1 3. The communication system of Claim 1 wherein said wired packet protocol is
2 Internet Protocol.

1 4. The communication system of Claim 1 wherein said private wired network
2 includes one or more local area networks and said private network includes
3 connection means for connecting the private wireless network to said local area
4 networks.

1 5. The communication system of Claim 4 wherein said connection means connects
2 the private wireless network and said private wireless network to public networks

3 whereby said wireless stations communicate with said public network through said
4 private network.

1 6. The communication system of Claim 5 wherein said public networks include the
2 Internet, PSTN and ISDN.

1 7. The communication system of Claim 1 wherein said private wired network
2 includes connection means for connecting the private wireless network to said local
3 area networks and to the public networks whereby said wireless stations operating
4 in said private wireless network communicate with said public network through said
5 private network.

1 8. The communication system of Claim 1 further including public networks and a
2 public wireless network wherein,
3 said public wireless network uses said wireless protocol whereby said
4 wireless stations communicate in said public wireless network and
5 said private wireless network,
6 said private wired network includes one or more local area networks and
7 said private network includes connection means for connecting the
8 private wireless network to said local area networks and to the
9 public networks whereby said wireless stations operating in said
10 private wireless network communicate with said public network
11 through said private network and whereby said wireless stations
12 operating in said public wireless network communicate with said
13 wireless terminals through said private network.

1 9. The communication system of Claim 1 wherein private wired network includes
2 one or more local area networks and said private network includes connection
3 means for connecting the private wireless network to said public wireless network.

1 10. The communication system of Claim 9 wherein said wireless stations and said
2 terminals have integrated voice and data operations.

1 11. The communication system of Claim 1 further including a public wireless
2 network using said wireless protocol whereby said wireless stations communicate
3 in said public wireless network and said private wireless network.

1 12. The communication system of Claim 11 wherein said wireless stations
2 communicate at data rates of the public wireless network when communicating over
3 the public wireless network.

1 13. The communication system of Claim 11 wherein said wireless stations
2 communicate at data rates of the private wireless network when communicating
3 over the private wireless network.

1 14. The communication system of Claim 13 wherein said wireless stations
2 communicate at data rates of 384Kb/s over the private wireless network.

1 15. The communication system of Claim 11 wherein said public wireless network
2 includes a public BSC, a public MSC and a public HLR for wireless stations making
3 calls using said public wireless network.

1 16. The communication system of Claim 15 wherein said wireless stations do not
2 require use of said public BSC, said public MSC or said public HLR for calls using
3 said private wireless network.

1 17. The communication system of Claim 1 wherein said wireless protocol is GSM
2 and has a wireless call build/teardown sequence and said wired packet protocol
3 includes H.225, H.245 and H.323 and has a wired packet call build/teardown
4 sequence and wherein said interface means integrates said wireless call
5 build/teardown sequence with said wired packet call build/teardown sequence.

1 18. The communication system of Claim 1 wherein said private wireless network
2 includes one or more wireless cells and said private wireless network includes
3 control means for controlling which ones of said cells service which ones of the
4 wireless stations.

1 19. The communication system of Claim 18 wherein said control means includes
2 handover means for controlling handover of wireless stations from one of said cells
3 to other of said cells.

1 20. The communication system of Claim 1 wherein said private wireless network
2 includes location means for sensing locations of wireless stations and includes
3 private location database means for storing the locations of wireless stations.

1 21. The communication system of Claim 20 wherein said private location database
2 means is accessible by said public networks.

1 22. The communication system of Claim 1 wherein said private wireless network
2 includes one or more private base transceiver stations, each private base transceiver

3 station establishing wireless communication, using said wireless protocol, with said
4 wireless stations located in a cell within a the private network.

1 23. The communication system of Claim 1 wherein said private wireless network
2 includes a plurality of private base transceiver stations, each private base transceiver
3 station establishing wireless communication, using said wireless protocol, with said
4 wireless stations located one or more cells within the private network, and wherein
5 said connection means includes a hub for connecting said plurality of private base
6 transceiver stations together in a local area network.

1 24. The communication system of Claim 23 wherein said local area network
2 includes gatekeeper means for providing control functions for operation of the
3 wireless stations according to the private wired packet protocol.

1 25. The communication system of Claim 24 wherein said gatekeeper means
2 includes, a gatekeeper, a gatekeeper database and an encoder/decoder for
3 registration, administration and status messages.

1 26. The communication system of Claim 23 wherein said local area network
2 includes a router for providing control functions for routing calls between the
3 private network and the public networks.

1 27. The communication system of Claim 26 wherein said public networks include
2 PSTN, ISDN and Internet networks.

1 28. The communication system of Claim 27 wherein said connection means
2 includes one or more gateways for providing control functions for the wireless
3 stations for converting the wired packet protocol to a public network protocol for
4 said PSTN and ISDN networks.

1 29. The communication system of Claim 28 wherein said public network protocol
2 is a PSTN protocol.

1 30. The communication system of Claim 28 wherein said public network protocol
2 is an ISDN protocol.

FIG. 1




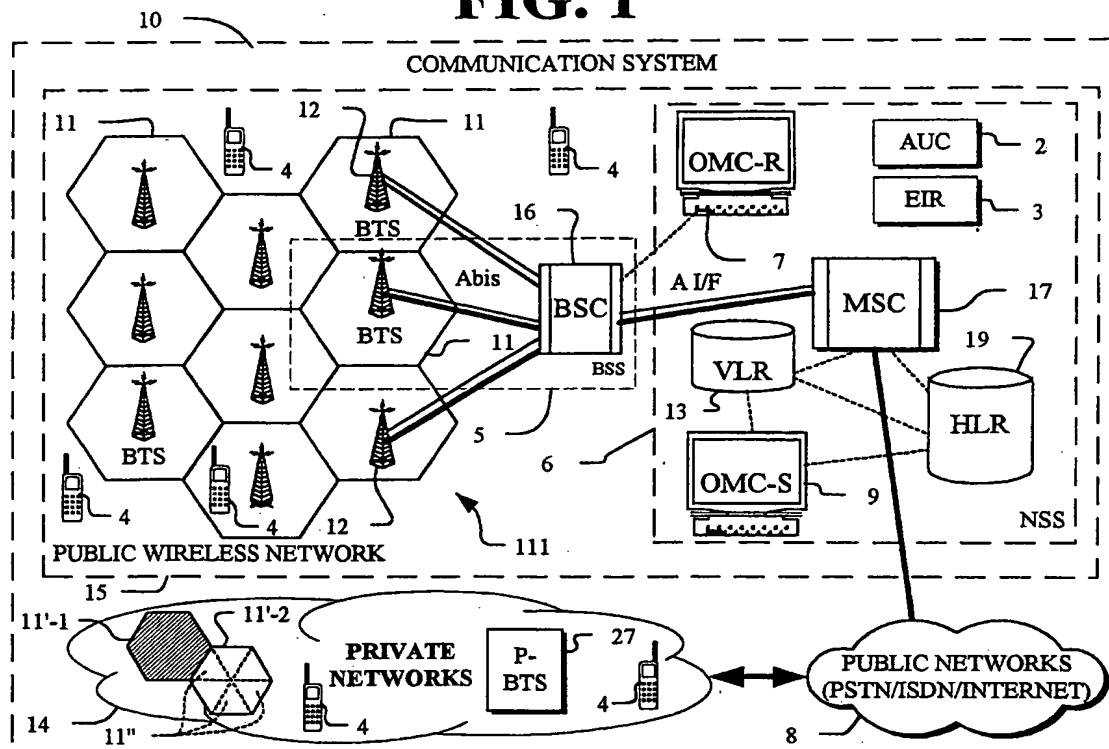


FIG. 2

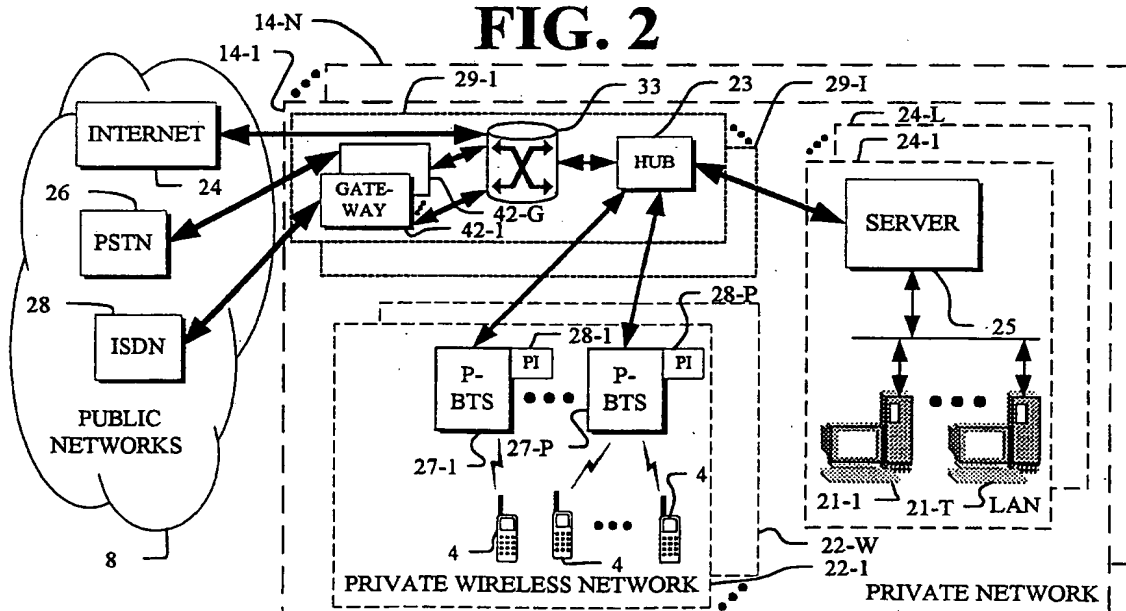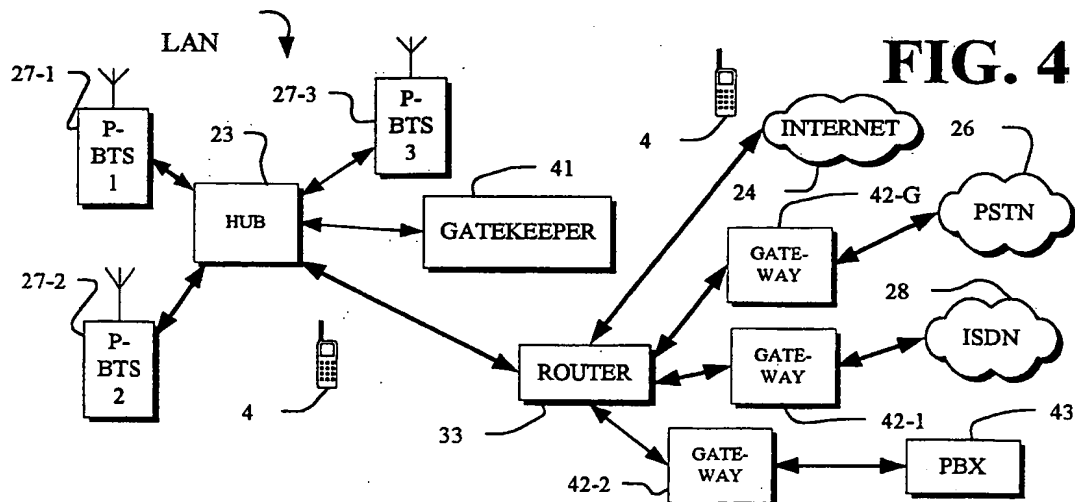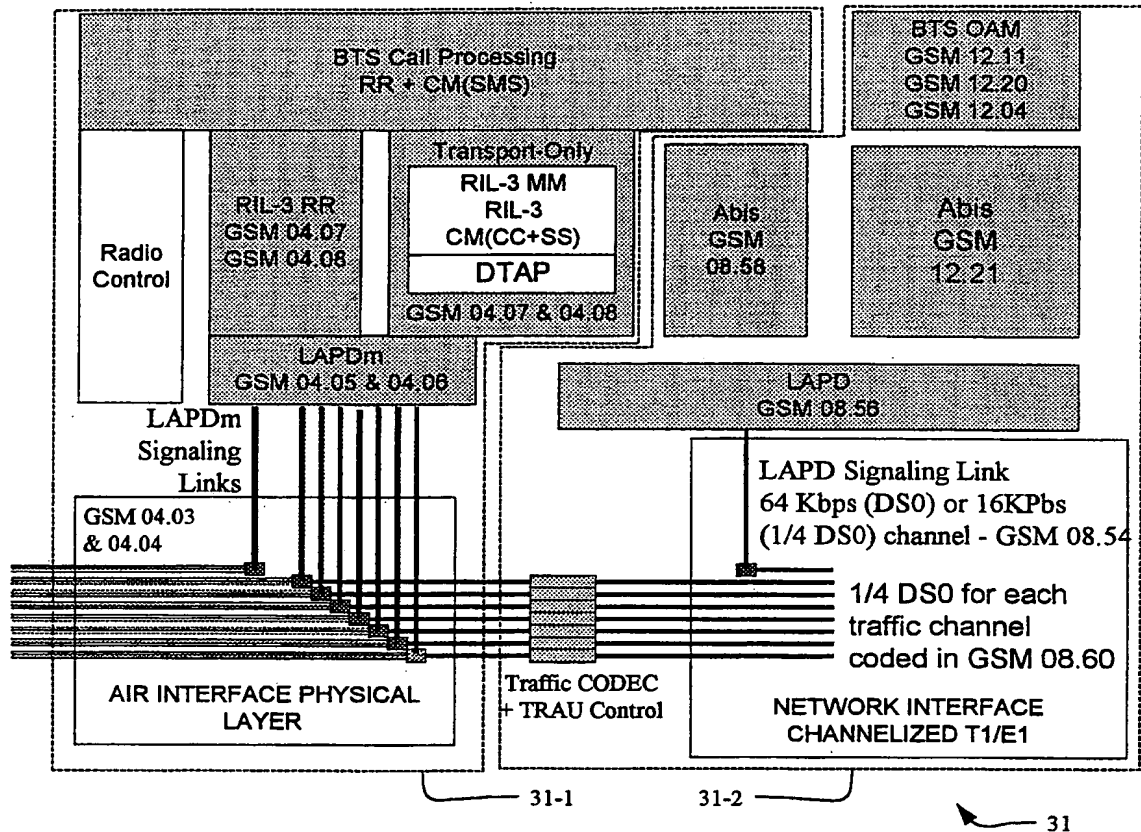

2/12

FIG. 3

3/12




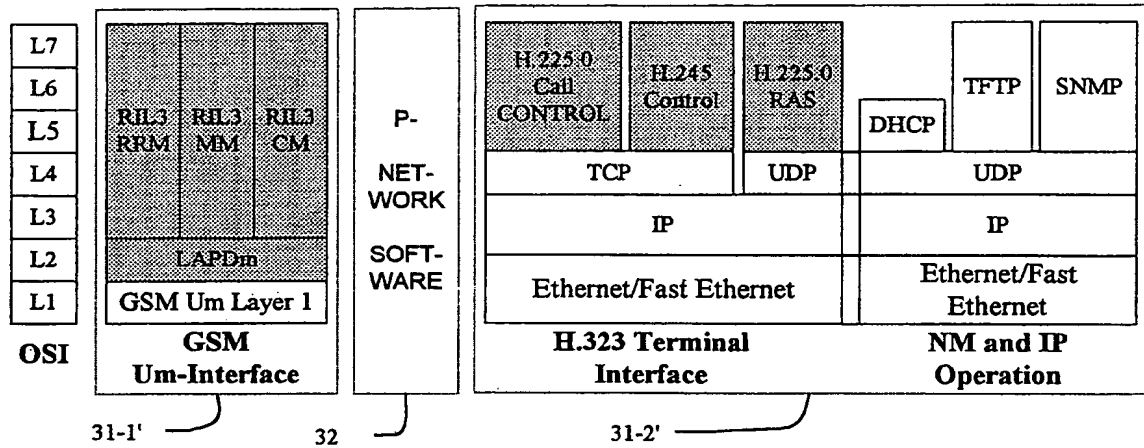
FIG. 5**FIG. 7**

FIG. 6

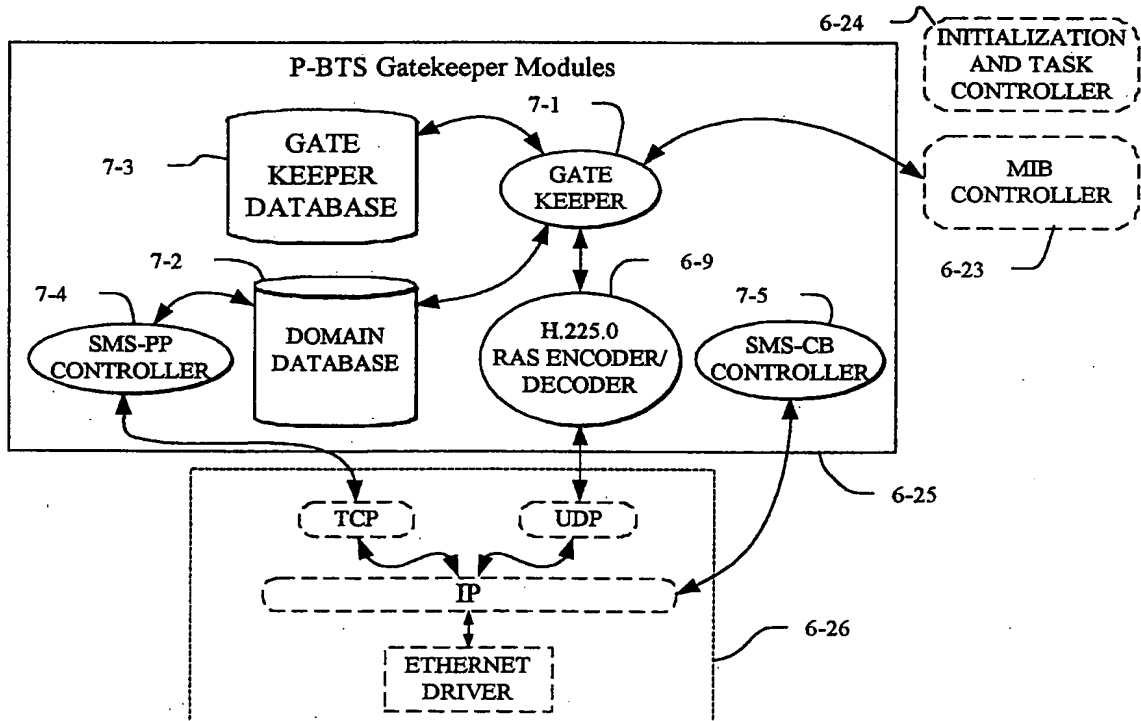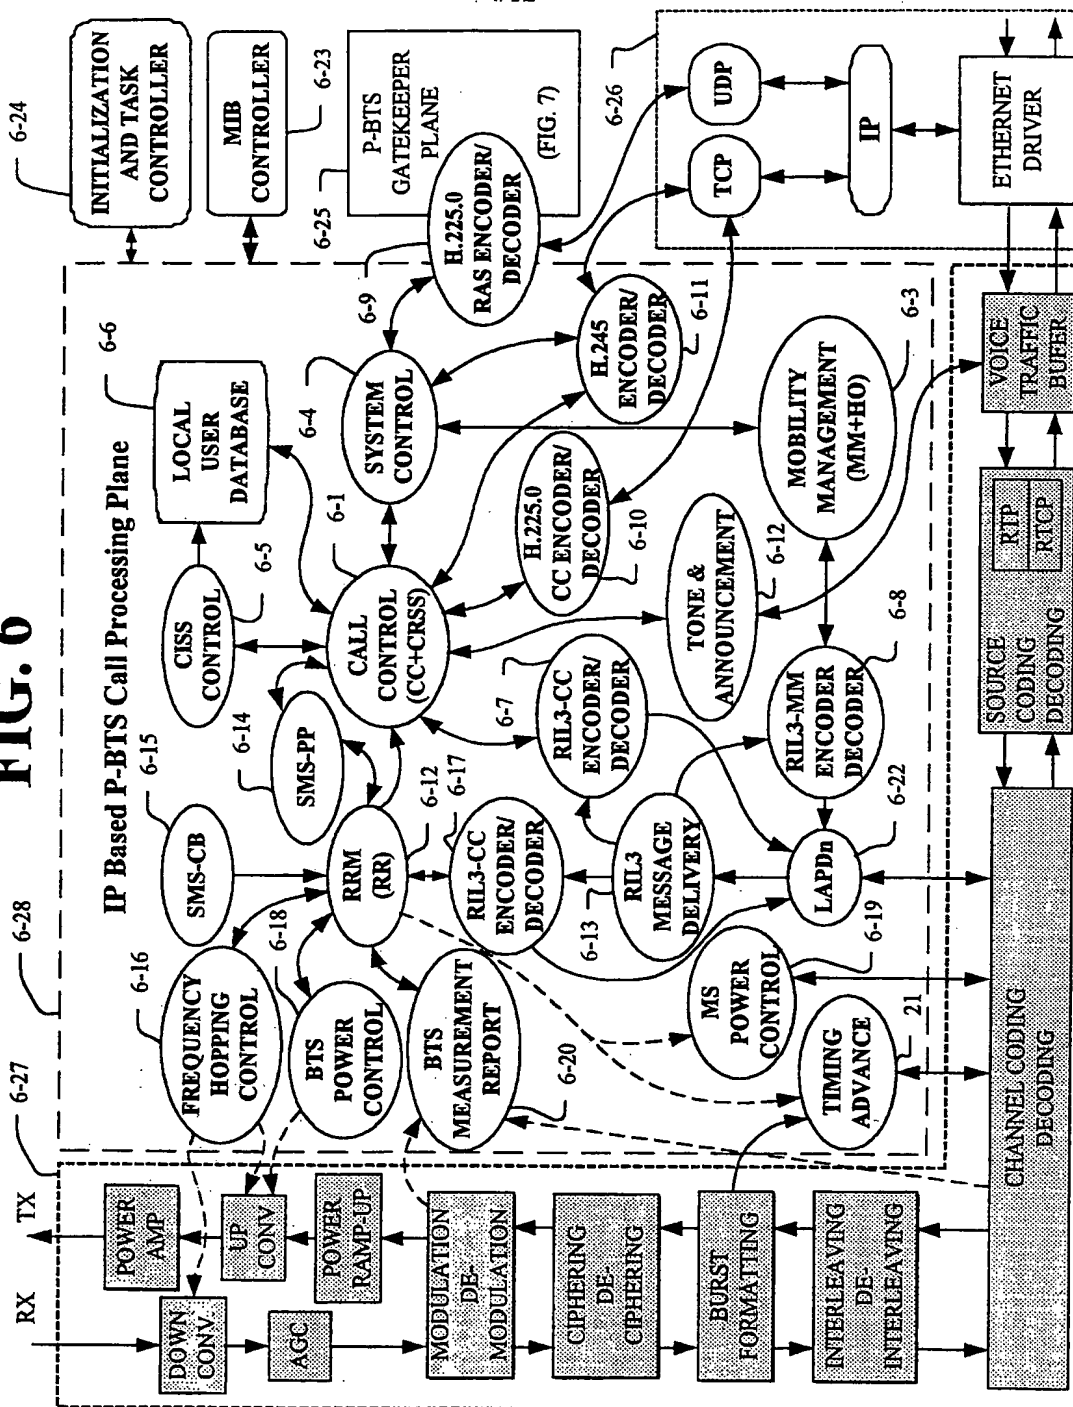

5/12
FIG. 8

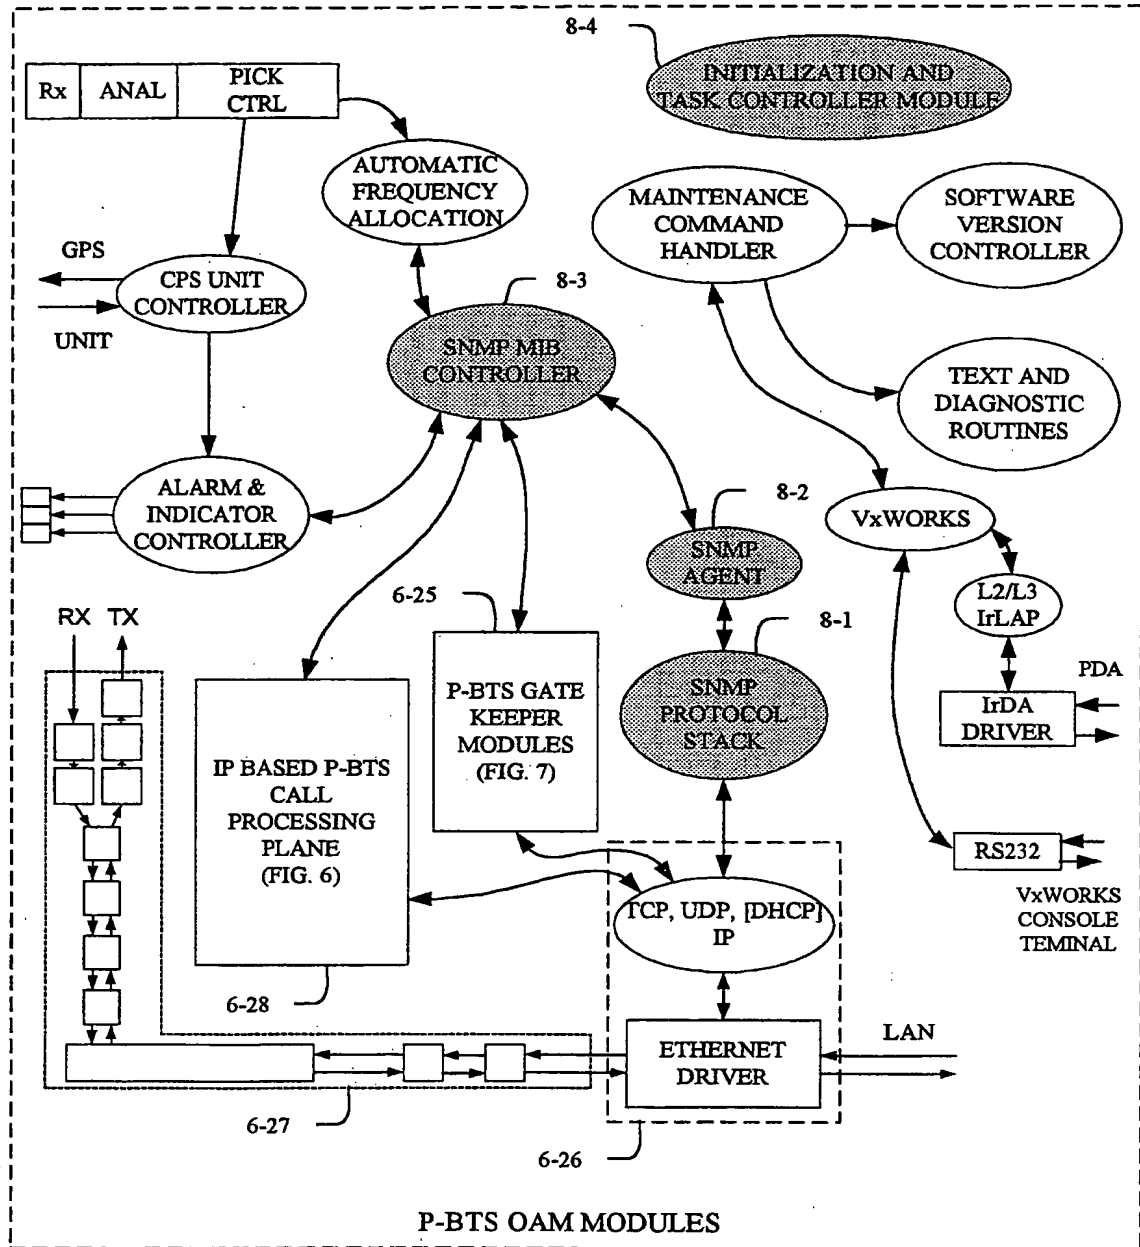

6/12

FIG. 9

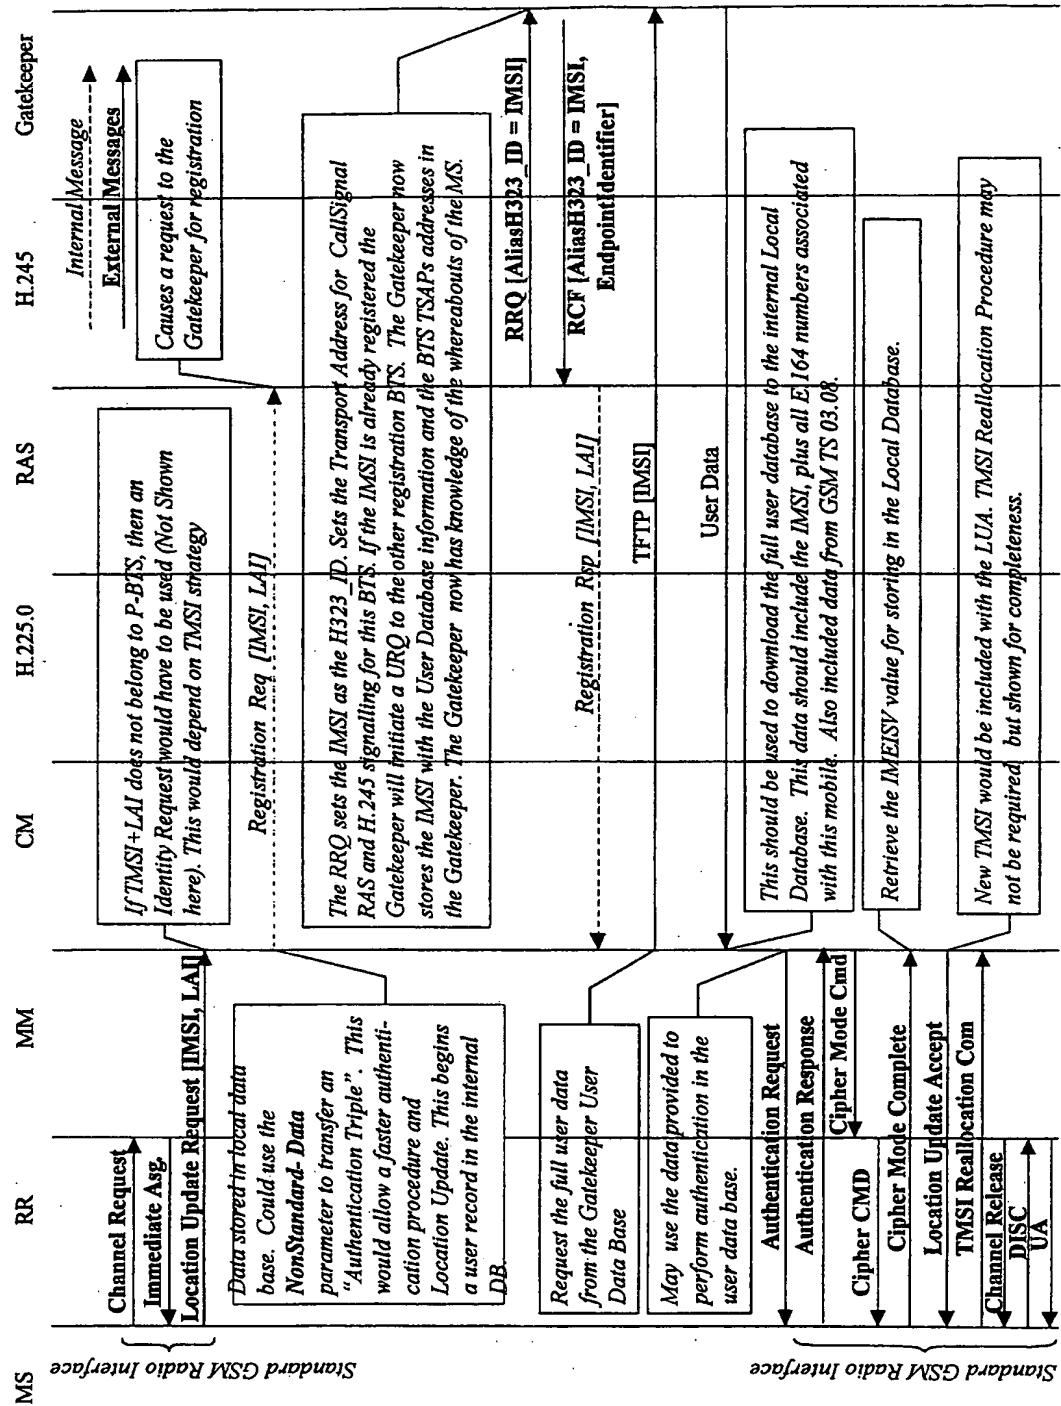


FIG. 10

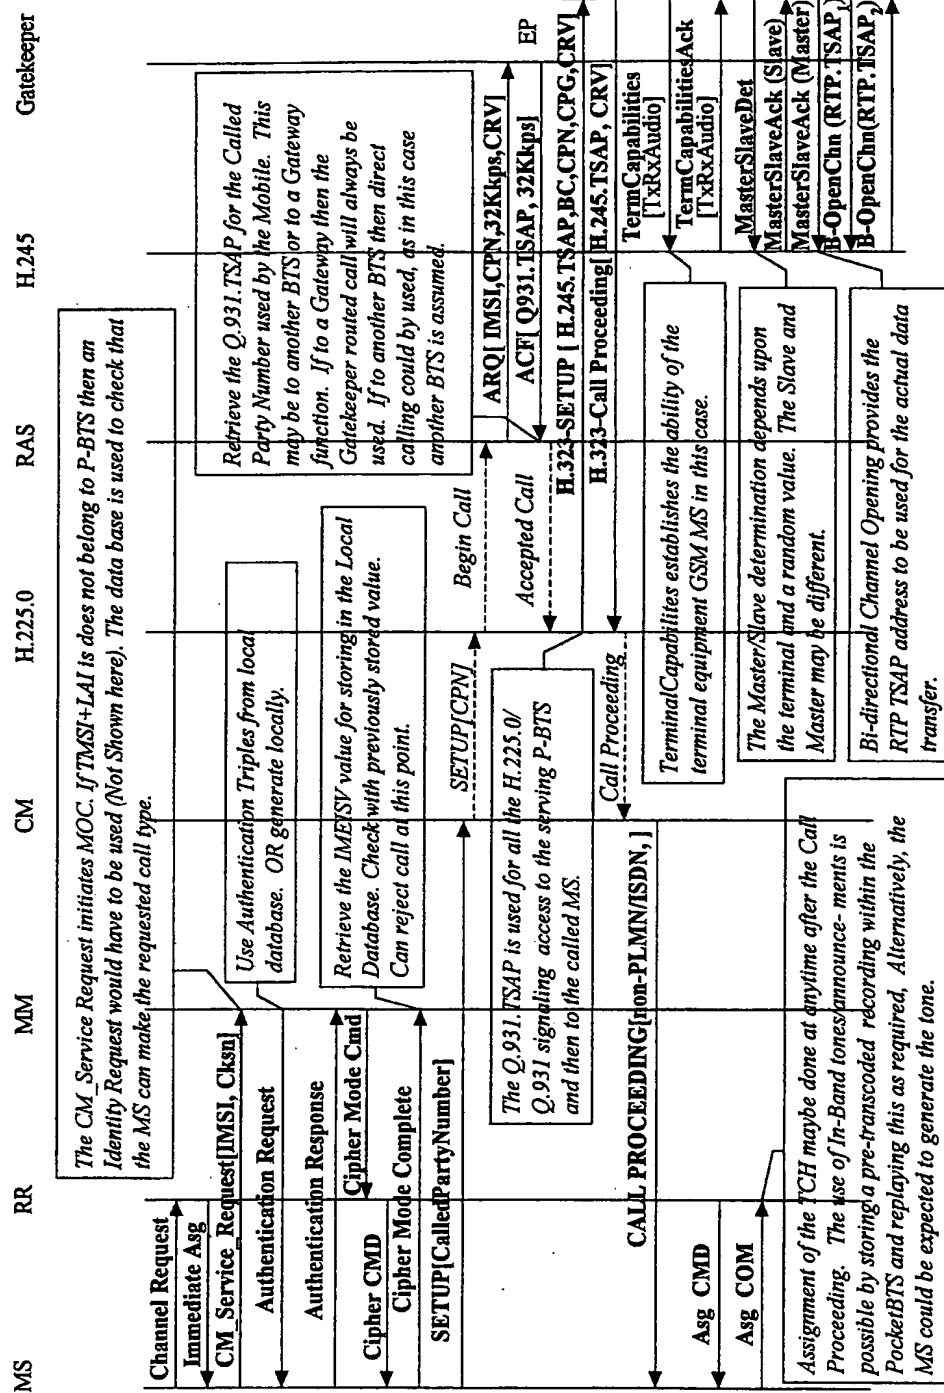


FIG. 11

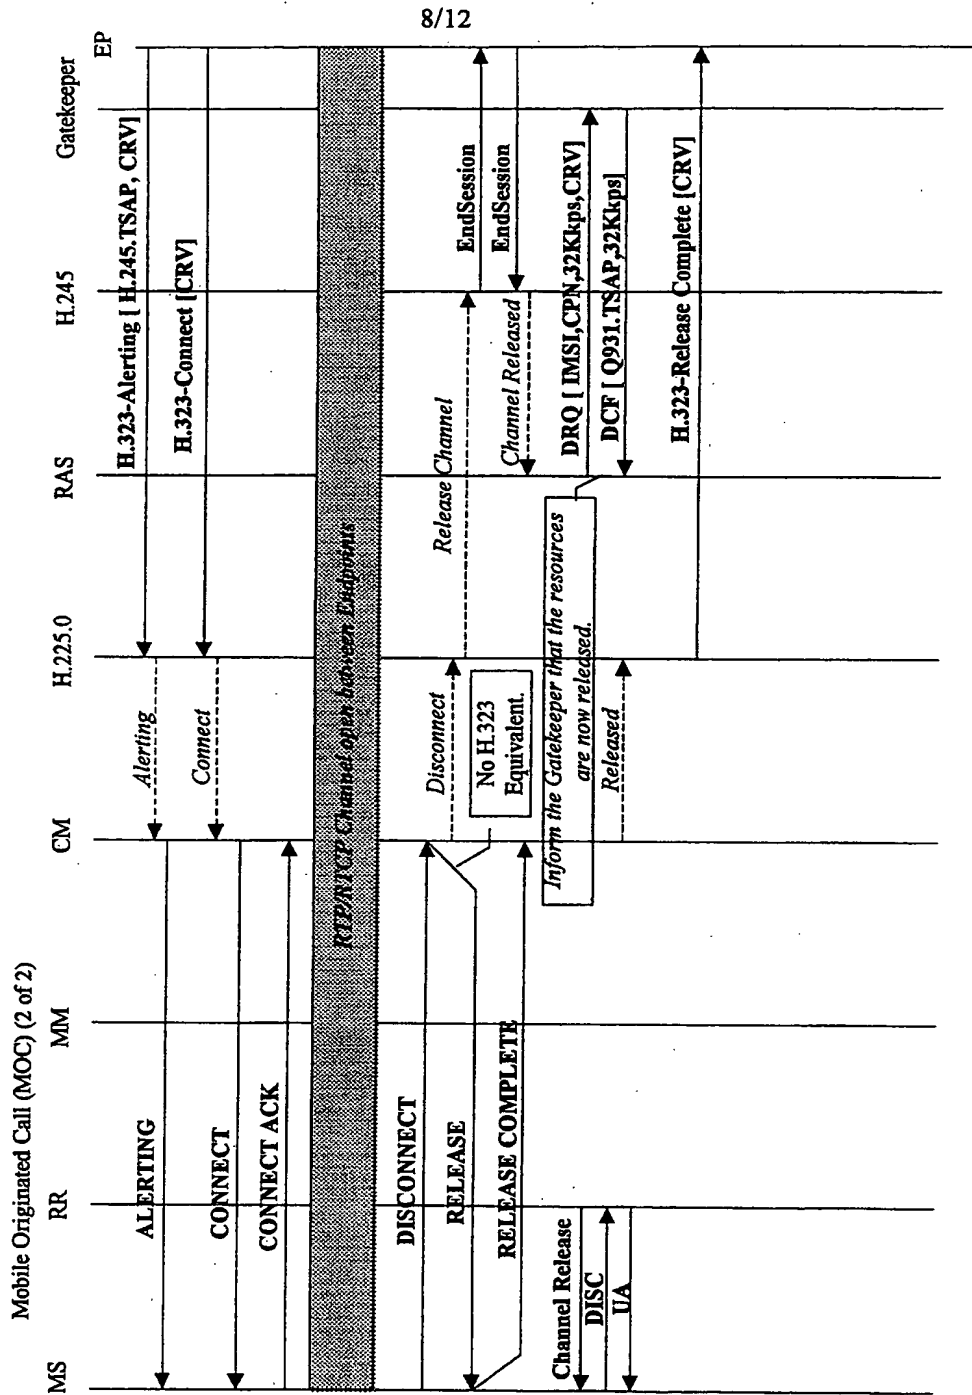


FIG. 12

Mobile Terminated Call (MTC) (1 of 2)


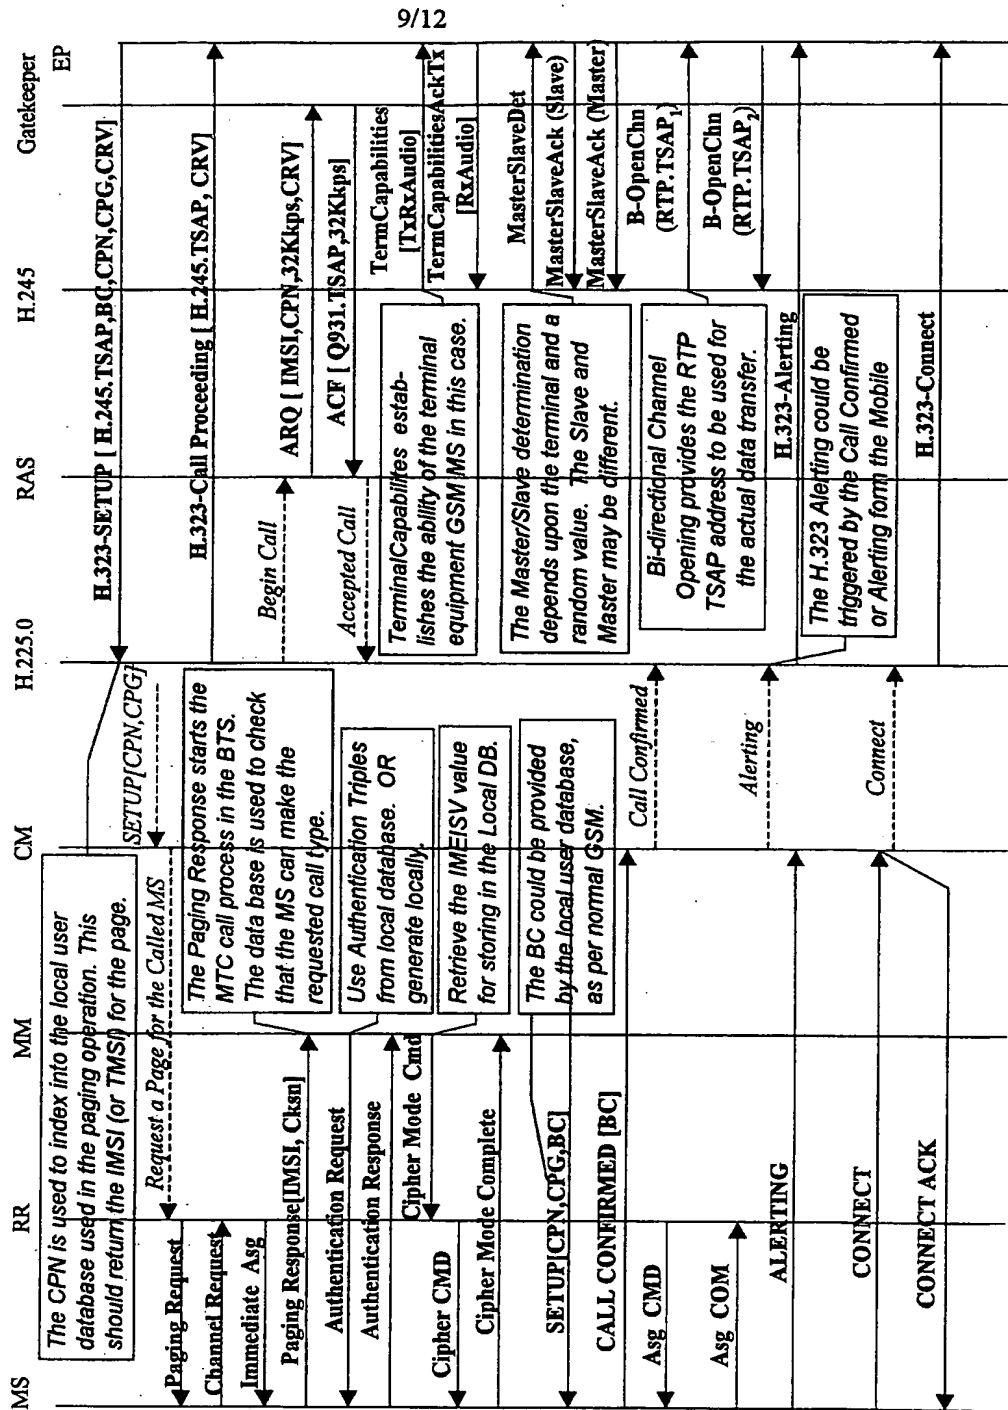


FIG. 13

Mobile Terminated Call (MTC) (2 of 2)

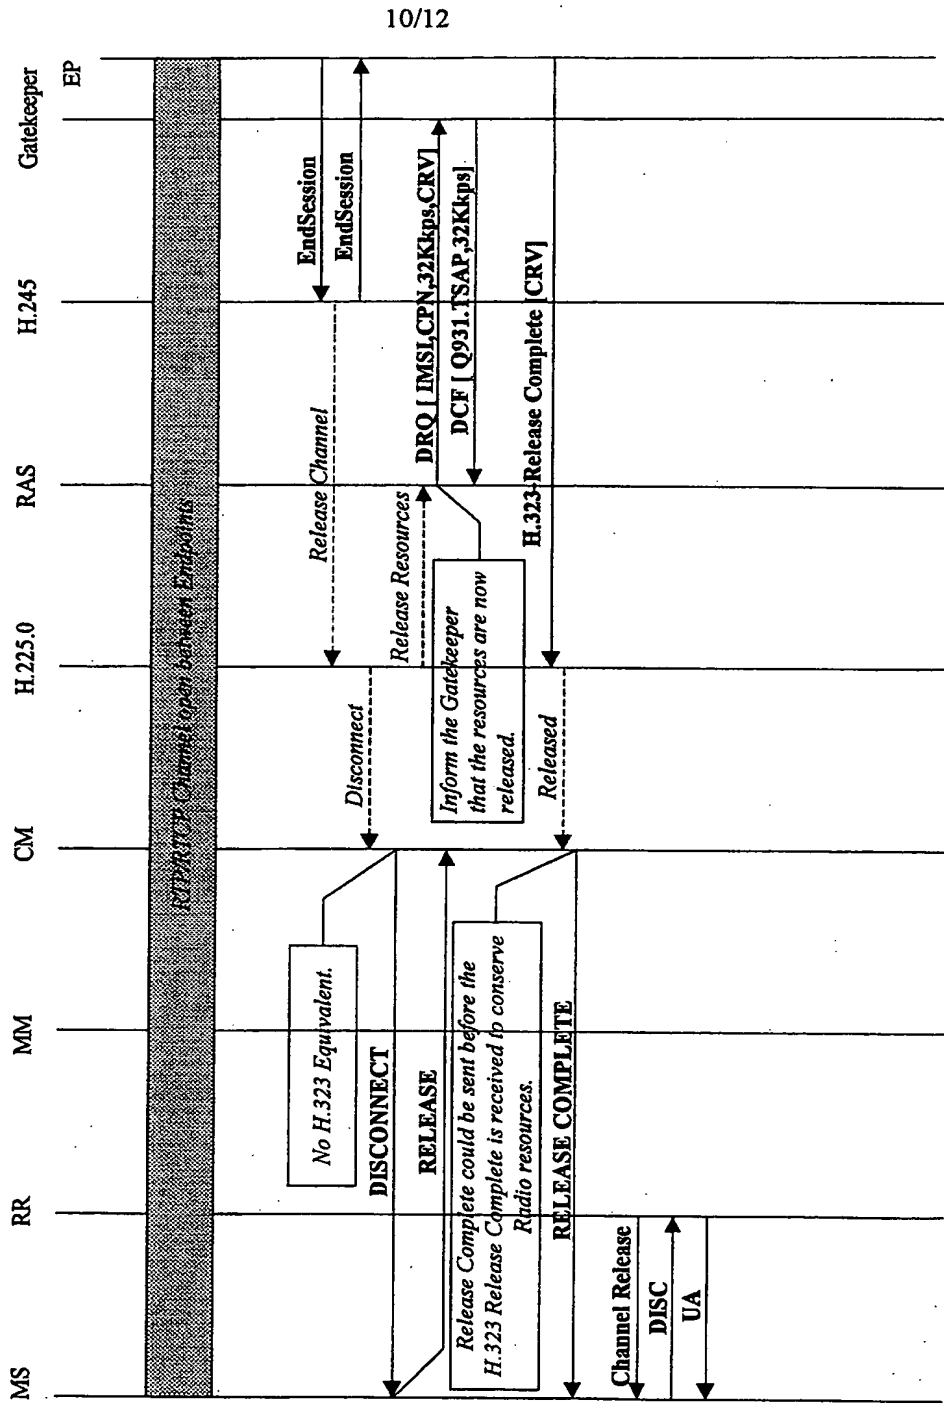

11/12


FIG. 14

EP3-New-P-BTS


EP2

EP1 - Old P-BTS

Handover

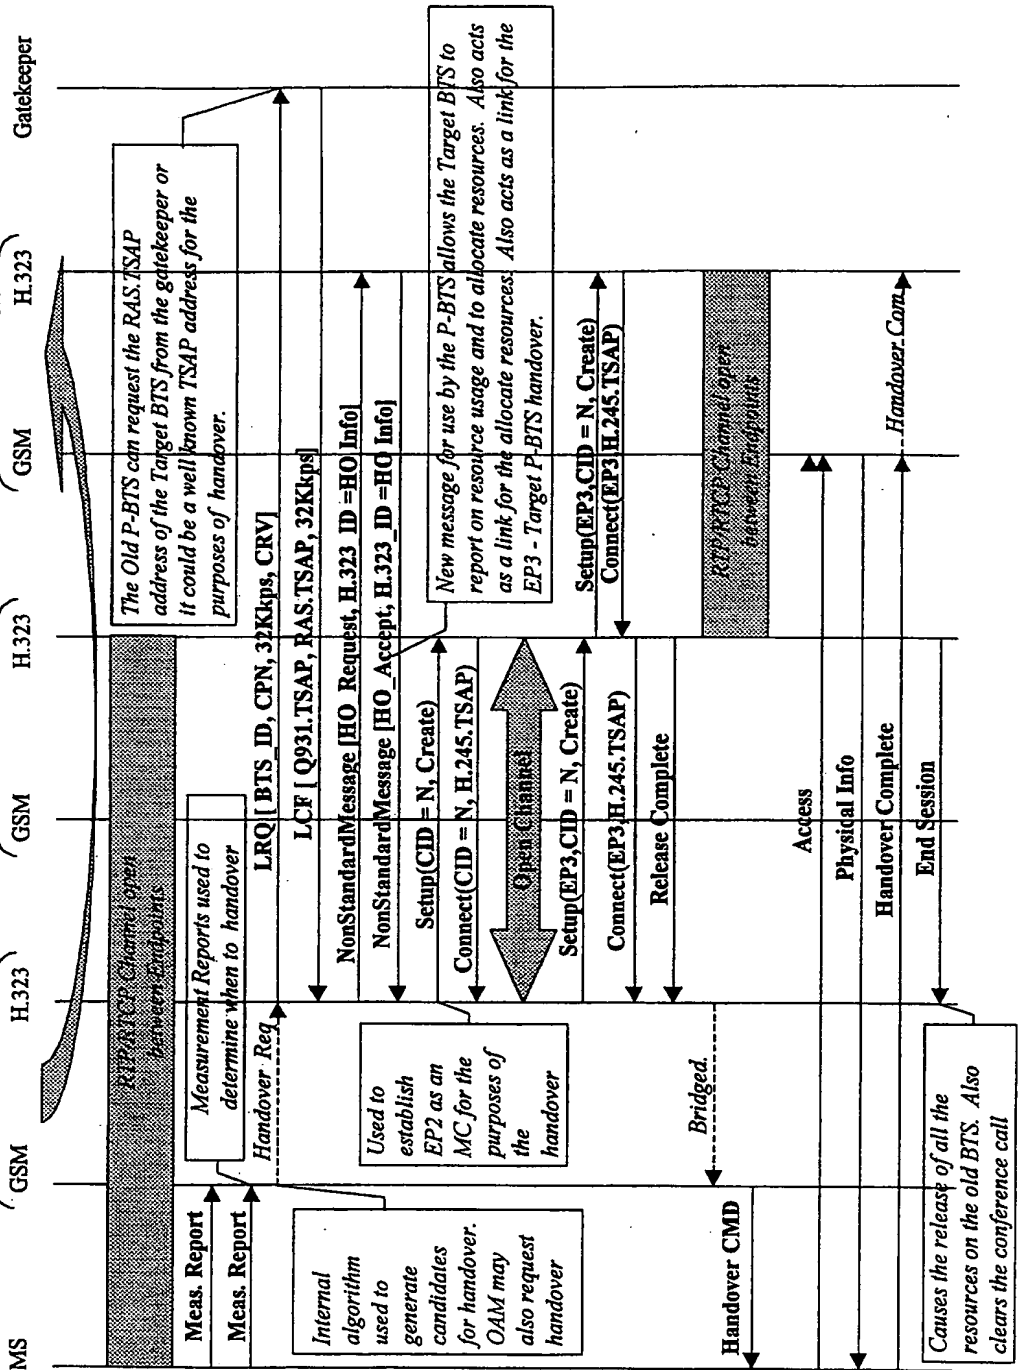

12/12

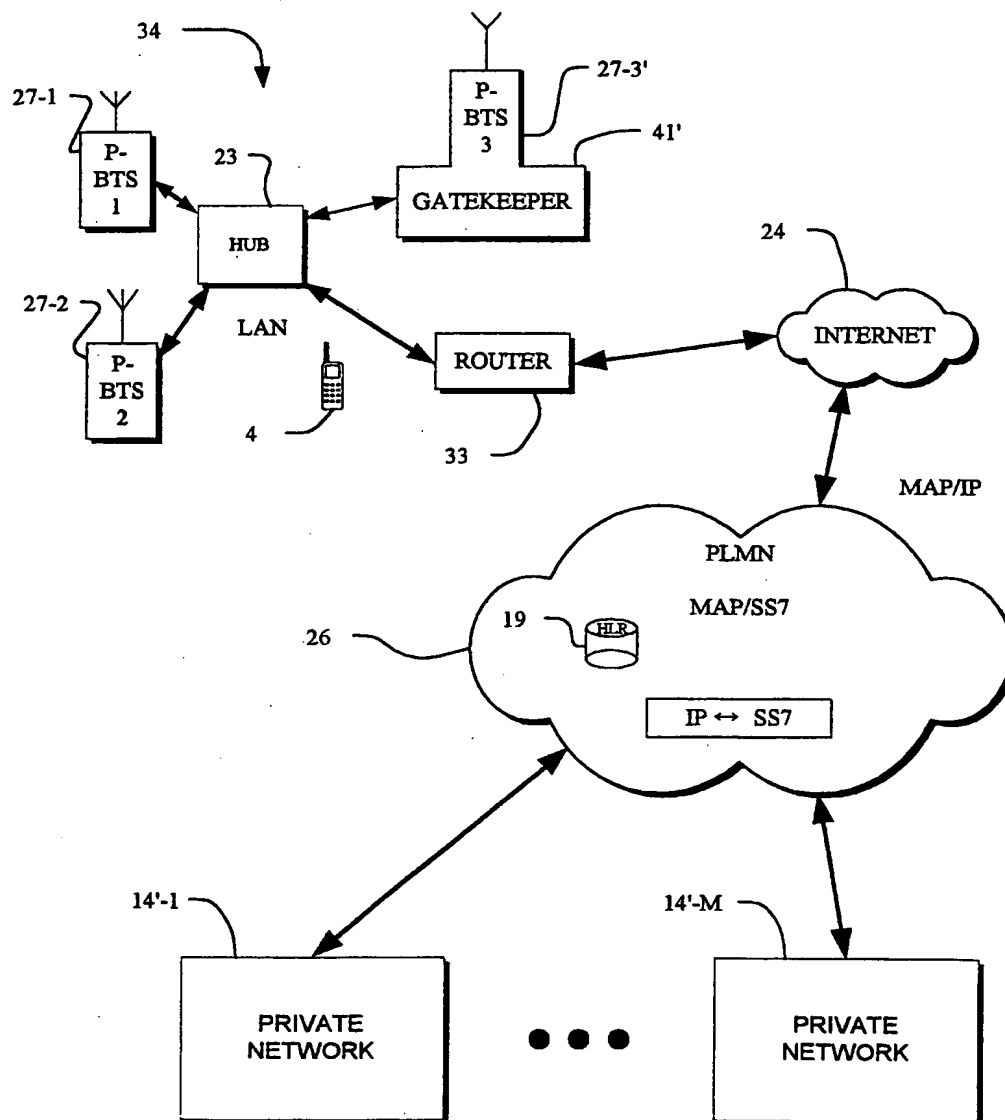FIG. 15

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 99/26375

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/26 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 602 843 A (GRAY THOMAS) 11 February 1997 (1997-02-11) the whole document	1-30
X	EP 0 766 427 A (NOKIA MOBILE PHONES LTD) 2 April 1997 (1997-04-02) the whole document	1-30
A	US 5 796 729 A (GREANEY SHAUN J ET AL) 18 August 1998 (1998-08-18) column 4, line 40 -column 7, line 11; figure 2	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

28 March 2000

Date of mailing of the international search report

12/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Le Bras, P

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/26375

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5602843 A	11-02-1997	CA 2154335 A DE 19526586 A GB 2291565 A, B	22-01-1996 25-01-1996 24-01-1996
EP 0766427 A	02-04-1997	FI 954638 A JP 9135479 A US 5949775 A	30-03-1997 20-05-1997 07-09-1999
US 5796729 A	18-08-1998	AU 6280096 A CA 2252473 A CN 1229544 A WO 9741650 A	19-11-1997 06-11-1997 22-09-1999 06-11-1997